

COASTAL ZONE MANAGEMENT PLAN OF KOLLAM DISTRICT, KERALA

(As per CRZ Notification 2011 in 1: 25000 scale)

Prepared for

**Kerala State Council for Science Technology and Environment
Govt. of Kerala**



**NATIONAL CENTRE FOR EARTH SCIENCE STUDIES
THIRUVANANTHAPURAM 695011**

June, 2014

PROJECT TEAM

Dr. K. V. Thomas	-	Principal Investigator
Dr. D. S. Suresh Babu	-	Co Principal Investigator
Dr. K. Raju		
B. K. Jayaprasad		
D. Raju		
S. Mohanan		
M.K. Sreeraj		
M.K. Rafeequ		

Project Staff

K. C. Vimal	-	Project Scientist
M. Rameshan	-	Project Scientist
Abhi Aravind	-	Senior Research Fellow
T. Neelima	-	Senior Research Fellow
R. V. Viji	-	Junior Research Fellow
T. J. Arun	-	Junior Research Fellow
C. Anoop	-	Technical Assistant
R. Swaraj	-	Technical Assistant
Muhammed Asif	-	Technical Assistant
P. T. Arun	-	Technical Assistant
Dileep Roy	-	Technical Assistant
Robert Thampi	-	Technical Assistant
Yedu Balachandran	-	Technical Assistant
Muhammed Sameer	-	Technical Assistant
Jose Mathew Varghese	-	Technical Assistant
R. Rajesh	-	Technical Assistant
K.V. Laju Prasad	-	Technical Assistant
R. Shihabudeen	-	Technical Assistant



CONTENTS

	Page Number
I. Introduction	1
II. CRZ of Kerala	1
III. Coastal Zone Management Plans	2
IV. CZMP in 1:25000 scale	3
1. High Tide Line	3
2. Low Tide Line	4
3. Setback lines	4
3.1. Setback line for CRZ II	5
4. Influence of Tidal action	5
5. Different approaches to demarcate HTL	5
5.1. HTL using morphological signatures	5
5.2 Field method	6
6. 100, 200 & 500 m lines	7
7. HTL demarcation in the field and CRZ map generation	8
7.1 CRZ/CZM map in 1:25000	8
7.2 CRZ/CZM map in 1:4000	9
7.3 Base maps	9
8. Field mapping and map generation	9
8.1 Use of Remote sensing data for HTL	11
8.2 LTL delineation	11
9. CZMP/CRZ map of Kollam in 1:25000 scale	11
9.1 Data Sources	12
9.2 Salinity and upstream boundary	12
10. CRZ categories	13
11. Summary	14
List of Figures and Tables	
Table1. CRZ details of Kollam District	14

COASTAL ZONE MANAGEMENT PLAN OF KOLLAM DISTRICT, KERALA

(As per CRZ Notification 2011 in 1: 25000 scale)



Prepared for

**Kerala State Council for Science Technology and Environment,
Govt. of Kerala**



**NATIONAL CENTRE FOR EARTH SCIENCE STUDIES
Thiruvananthapuram 695 011, Kerala**

June 2014

National Centre for Earth Science Studies, Thiruvananthapuram

Coastal Zone Management Plan (CZMP) of Kollam District in 1:25000

I. Introduction

Damages to coastal zone and the impact of coastal hazards to coastal communities and properties, to a certain extent, can be controlled by regulating high impact activities in the coastal zone. It was with this objective the Coastal Regulation Zone (CRZ) Notification (MoEF, 2011; 1991) was introduced in the country. The Coastal Regulation Zone (CRZ) notification of 2011 has made it mandatory for the State to prepare Coastal Zone Management Plan (CZMP) as per the guidelines in the notification and get it approved by the Govt of India. Accordingly the preparation of the CZMP has been entrusted with the National Centre for Earth Science Studies (vide reference STED S.O (M.S) No. 02/2014/STED dt. 10.03.14 and Council (P) Order No. 356/2014/KSCSTE dt.30.04.2014) Coastal Zone Management Plan (CZMP) for Kollam district has been prepared as part of the study.

II. CRZ of Kerala

CRZ (2011) notification (para 7 (V) A(ii)) has approved a special status for Kerala coastal zone as “areas requiring special consideration for the purpose of protecting the critical coastal environment and difficulties faced by local communities”.

1. To facilitate the above requirement, the CRZ of Kerala has been categorized under **Category V (CRZ V)** within which CRZ I, CRZ II, CRZ III and CRZ IV are defined.
2. While detailing the ‘Norms for regulation of activities permissible under this notification it is mentioned under (para 8 (V) 2) that in view of the unique coastal systems of backwater islands along with space limitations along the coast of Kerala, the following activities are regulated in CRZ:
 - (i) all the islands in the backwaters of Kerala shall be covered under the CRZ notification;
 - (ii) the islands within the backwaters shall have 50mts width from the High Tide Line on the landward side as the CRZ area;



- (iii) within 50m from the HTL of these backwater islands existing dwelling units of local communities may be repaired or reconstructed however no new construction shall be permitted;
 - (iv) beyond 50mts from the HTL on the landward side of backwater islands, dwelling units of local communities may be constructed with the prior permission of the Gram panchayat;
 - (v) foreshore facilities such as fishing jetty, fish drying yards, net mending yard, fishing processing by traditional methods, boat building yards, ice plant, boat repairs and the like, may be taken up within 50m width from HTL of these backwater islands.
3. Under ‘Guidelines for preparation of Coastal Zone Management Plans in Annexure I(II)12, it has been directed that ‘In the CRZ V areas the land-use map shall be superimposed on the Coastal Zone Management Plan and clearly demarcating the CRZ I, II, III, IV’.

The fisher people are confined to a very narrow stretch of 50 to 100m from the HTL and belong to ‘ecosystem people’ who require the coastal zone for their settlement requirements and livelihood related activities. Considering the livelihood requirements of the ecosystem people, the high density of coastal population, unique style of their livelihood activities, the CZMP have to project the various requirements to address the difficulties faced by local communities.

III. Coastal Zone Management Plans

The CRZ provides a spatial planning framework for Coastal Zone Management Plans which provide setbacks around sensitive eco-zones restricting development and other activities close to it. Setbacks require specific reference lines and boundaries for its meaningful implementation. The High Tide Line (HTL) forms the cardinal reference line for determining the setbacks for CRZ. The 100, 200 and 500m CRZ lines landward from the HTL are the landward setback lines. The Low Tide Line (LTL) and the Territorial water boundary (12nm) form the setback lines towards the sea. The Coastal Zone Management Plans are prepared in 2 scales:



1. CZMP consisting of CRZ maps in 1:25000 scale with Survey of India toposheets as base maps.
2. CZMP consisting of CRZ maps in 1:4000 scale with cadastral maps as base maps.

The approach followed is:

- i. Generation of data in 1:4000 scale on HTL, LTL and eco-morphological systems relevant for CRZ.
- ii. Demarcation of HTL, LTL, ecosystems and morphology relevant for CRZ in 1:25,000.
- iii. Demarcation of HTL, LTL, ecosystems and morphology relevant for CRZ in 1:4,000 scale.
- iv. Preparation of CZMP maps consisting of CRZ maps in 1:25000 scale.
- v. Preparation of Local Level CZMP maps in 1:4000 cadastral scale.

The CZMP/CRZ maps in 1:25000 scale with Survey of India toposheets as base maps are required for formulating policy decisions. These are to be submitted to MoEF, Govt of India for approval after stakeholder/public consultations. The local level CRZ/CZMP are prepared in 1:4000 with cadastral base maps and based on the approved CZMP.

Local level data in cadastral scale has been generated initially which is being used for preparing the 1:25000 CZMP on toposheet base maps. The same is used for local level CRZ/CZMP maps.

IV. CZMP in 1:25000 scale

The present study and report provide the CZMP in 1:25000 scale.

1. High Tide Line

Different tide levels like Mean High Water Springs, Mean Low Water Springs, Lowest Astronomical Tide, etc are defined and successfully used for navigational purposes and sea surveying. The High Tide Level is dependent on lunar cycles. It is normally taken as the water level at which the high tide intersects with the vertical plane.

The above definition is not in commensurate with the objectives of demarcating the HTL which is to regulate the activities on the land. The experience of Naval Hydrographer while demarcating the HTL in Goa way back in 1992-93 brought out the limitations in assigning



the usual definitions for the HTL (Menon, 1993). The HTL demarcated in this case for Goa was found to be in the sea during the next monsoon.

A functional HTL is defined in the CRZ notification with the sole objective of protecting a given stretch of coastal strip from environmental degradation. Hence an approach different from the ones followed for navigational purpose, is necessary for demarcating HTL, in tune with the definition given in the Notification.

The HTL is defined ‘for the purpose of the notification’ as “*the line on the land upto which the highest waterline reaches during the spring tide*” which is different from the well known and widely accepted definition of High Tide Level. The above definition of HTL takes into consideration not only the level of inundation due to maximum tide (spring tide) but also the wave set up (having a seasonal periodicity). The sea level thus formed due to the combined effect of spring tide and wave set up gives the line of maximum reach of water on the land.

There is a similarity between the HTL thus defined and the High Water Line (HWL) given in Survey of India (SoI) toposheets. Both are lines drawn on the land. But the HWL and HTL are different that the former gives the fair season shoreline (because SoI field mapping is conducted during non-rainy season) during spring tide while the latter accommodates the rough season (monsoon) shoreline oscillations due to monsoon wave set up in addition to spring tide inundation.

2. Low Tide Line

Unlike the HTL the Low Tide Line (LTL) has not been defined for CRZ. The HTL required specific definition since the 100, 200 and 500m setback lines are defined with respect to the HTL. The conventional definition of lowest low water level and the resultant low water line during spring tide may be taken as the LTL.

3. Setback lines

The 100, 200 and 500m setback lines are drawn landward of the HTL. Once the HTL is well defined and demarcated, the above 3 setback lines could be drawn without any ambiguity following planimetric methods.



3.1. Setback line for CRZ II

For urban areas like Kollam Corporation in which developed areas are eligible to be categorized as CRZ II, the setback lines are different. Those prohibited activities listed under para 3 in the CRZ notification (2011) are applicable for the entire CRZ including CRZ II. Other construction activities are permitted in CRZ II landward of ‘existing’ buildings or ‘existing’ or ‘approved’ roads. The word ‘existing’ and ‘approved’ are specifically defined in the notification.

4. Influence of Tidal action

The distance up to which CRZ is applicable upstream of estuaries, creeks, backwaters and lagoons depends on the extent of tidal influence. The distance up to which tidal influence is experienced is dependent on salinity concentration: if it is 5 ppt or more (during the driest month) the water body is considered to be influenced by tidal action (MoEF, 2011). Salinity measurements are carried out during the driest month (usually during March-April) to determine the limit. Tidal barrages and bunds constructed are also taken as the limit of tidal influence.

5. Different approaches to demarcate HTL

The highest level horizontal positional and spatial accuracy in mapping and presenting the HTL becomes necessary for field uses by CRZ implementing agencies. The agencies are looking for a planimetric accuracy approaching zero error.

The different approaches now practiced in the country to demarcate the HTL are:

- tide level projection
- using morphological signatures
 - field methods
 - satellite data

The NCESS follows the approach using morphological signatures (CESS, 1995)

5.1. HTL using morphological signatures

Morphological signatures are good indicators of shoreline oscillation and inundation of coastal waters, which could be used for identifying the HTL. The inundation of coastal waters on to the land and seasonal shoreline oscillations are dependent on coastal



morphology. Shoreline remains stable and would not retreat significantly along cliffy coasts. The shoreline retreats up to the cliff base along pocket beaches. Artificial morphologies like seawalls confine the oscillation of shoreline along the line of the structure itself. Sandy beaches are prone to seasonal and long term shoreline oscillation. Long term stability of the beach and the position of the stable part of the beach would be evident from morphological signatures such as berm and berm crest.

This could be done by field methods and using satellite data.

5.2. Field method

The HTL has to be fixed with respect to certain reference points on the land. These reference points at sufficiently close intervals (preferably at least 1km alongshore) have to be marked with respect to latitude-longitude and known points in the base map. Geomorphologic features like berm crest, cliff, headland, line of permanent vegetation, etc are indicators of the reach of sea water into the land. Stable coastal protective structures like seawall also limit the intrusion of seawater. Hence High Tide Line (line of maximum reach of seawater into the land during spring tide) can be fixed in the field, with respect to these features and tied to the reference points, as detailed below.

a. *Landward (monsoonal) berm crest for beaches*

In all the well-formed wide beaches, one or more berms (which are nearly horizontal part of the beach formed by the deposition of sand by wave action) are usually observed. The seaward end of the berm, which shows a sudden downward slope is called the berm crest. When there is only one berm, it normally gets eroded during the monsoon with a berm crest on the landward side. But when there are two berms the landward berm is the monsoonal berm, which normally do not get eroded. Or else we can say that the erosion reaches only to the second berm crest. Since the tidal waters do not reach the coast beyond this landward berm crest, it is taken as the HTL. The distance to this point from the reference point is measured using the beach profile to fix the position of the HTL.

b. *Seawall/revetments/embankments*

In highly erosion-prone areas, there are no landward second berms. Such locations will be protected mostly by seawalls. During monsoon season majority of these are devoid of



beaches. The waves impinge upon the seawall during the monsoon season, especially during the high tide. Thus they are the artificial barriers stopping the waves/tides at the coast. Since the seaward part of the seawall in most cases is defaced due to erosion, the landward toe is taken as the HTL boundary in such locations. There are some locations with two or three lines of seawall, particularly in the accreting areas. The seaward seawall is considered here for the purpose. On the other extreme, in the case of continuously eroding sites there are lines of seawall which are now in the sea. In such cases the landward seawall is taken. In order to facilitate the demarcation of HTL at seawall locations, the latter has to be clearly marked in the beach profile during coastal surveys.

c. Permanent Vegetation Line

Permanent vegetation develops on the stable part of the beach. The part of the beach landward of monsoon berm crest is mostly stable. Hence the line of permanent vegetation normally follows the line of monsoon berm crest which is the HTL.

d. Tidal flats and mudflats

Tidal flats and mud flats are formed by fine-grained silts and clays in a medium to large tidal environment. They have a fairly large intertidal zone fringed by vegetation. In such cases the landward limit of HTL can be demarcated as the line of permanent vegetation other than salt marsh vegetation and mangroves of intertidal habitat. Other geomorphic signatures like changes in land forms and sediment characteristics can also be used.

e. Rocks, Headlands, Cliffs

At the rock outcrops, headlands and cliffs the water is quite deep that there is virtually no spatial displacement in the waterline. Hence, the High Water Line available in the topographical maps (transferred to the base map) can be taken as such. However, at the eroding laterite cliffs (e.g. Varkala, Paravoor, Thalassery in Kerala), the latest position of the toe is taken from the cross section measured at the respective sites. This is to be verified against the satellite imagery and transferred to the base map.

6. 100, 200 & 500m Lines

Once the reference points and the HTL are available, it is not difficult to draw 100, 200 and 500m line on the map as required in the Notification.



The distance of 100, 200 and 500m from the HTL is converted to the map scale at each reference point and demarcated. The above lines are drawn parallel to the HTL uniformly all along the coast.

For the use in the field, the distance of LWL, 100, 200 and 500m line from HTL from all the reference points can be given as a table. The location details, including place names, latitude, longitude etc can also be given in these tables.

7. HTL demarcation in the field and CRZ map generation

Since CRZ is applicable to inland water bodies, the influence of tidal action upstream of the water bodies is determined by verifying the salinity of the water body during the driest month of the year. If the salinity is 5 ppt or more, then the water body is considered to be influenced by tidal action. This is assessed from field measurements and indicators like the limit of tidal influence given in the CZMP (1996) and presence of mangroves.

Field studies are undertaken for fixing ground control points for georeferencing and referring the position of the HTL. A hybrid approach of field studies supported through information extracted from satellite imageries and existing maps are relied upon for CRZ mapping to identify the HTL, LTL, eco-geomorphic systems and land use relevant for CRZ. The eco-geomorphic systems include mangroves, intertidal zone, mudflats, salt pans, etc.

7.1. CRZ/CZM map in 1:25000

The CRZ map in 1:25000 is prepared with Survey of India toposheets as base maps. These toposheets being of the coastal area, are restricted and hence have to be procured through proper channel following specified procedures and after giving statutory undertakings to ensure authorized use and safe custody. Toposheets of the area of study are georeferenced and the High Water Line (HWL) in the toposheets have been extracted along with other coastal features like waterbodies, inter tidal zones, mudflats, beaches, mangroves, salt pans, prawn aqua farms, etc. The HWL is updated with current field measurements and satellite imageries to get the present HTL. Field measurements were made in 1:4000 scale for better accuracy and compatibility with large scale local level CZMP.



The variations of present HTL from that of CZMP (1996) is verified and documented. The probable reasons for the variations are looked into and the details are given wherever possible.

7.2. CRZ/CZM map in 1:4000

The base map on which HTL and LTL are demarcated have to be familiar for officials of local bodies and the public. These have to be of sufficiently large scale with sufficient number of reference points identifiable on the ground for facilitating field applications.

7.3 Base maps

Cadastral maps available with Revenue/Survey and Land Records Dept are in 1:4000 or 1:5000 scale. Survey plots and plot boundaries are locatable on the ground. ‘Plot boundary junction points’ are taken as the reference points. The National Centre for earth Science Studies has successfully used cadastral maps for preparing Panchayat resource maps which are being widely used by local bodies for local level planning (CESS 2000).

8. Field mapping and map generation

Initially cadastral maps of the required area are obtained from the concerned departments (Revenue/ Survey and Land Records Dept). These are checked for its scale accuracy through comparing the distance of 2 known points from the map and from the ground. Toposheets and imageries of the area for which HTL is to be demarcated, are referred to know the features and available morphological signatures. Information derived from toposheets and satellite imageries of different coastal ecosystems in the given area is used as baseline information for planning the field investigations. Cadastral maps are rectified with coordinates of known ground control points (GCP) taken from the field. The datum used is WGS 84 and the projection is UTM.

Ground features that can be clearly identified both on the ground and on the cadastral map are used as ground control points (GCP). With precise planimetry of the identified GCPs, the cadastral maps are geo-referenced with GPS/DGPS measured geo coordinates. GCPs used are survey plot boundary junctions or survey stones established at the time of field survey for the preparation of cadastral maps. These are identified in the field. At least one control point is identified within 1km of alongshore length. The coordinates (Latitude; Longitude) of the



identified control points are taken using GPS/DGPS. The signature for the nearest HTL is identified and distance to the HTL from the control point is measured with distometer (usually laser distometer). The GPS/DGPS is moved along the HTL identified through signatures and the readings are recorded. Wherever possible these are linked to the control points identified earlier and distance to HTL measured with distometer. The data thus collected is transferred to cadastral maps and superimposed in GIS platform. Information from satellite imageries are used to verify the data collected and also to supplement the data wherever the area is not approachable. Cadastral maps and satellite images are rectified in the same geographical coordinate system and projection.

The most difficult part is the transferring of information from imageries to un-projected cadastral maps on which CRZ maps are prepared. This is overcome by using sufficient number of precise reference/control points spread over the entire study area for georeferencing and compartmentalizing the maps. One of the major contributors to errors is those occurring while reproducing the cadastral map from original map through photocopying and scanning. While photocopying the enlargement or reduction produce the scale error; also the shrinkage/folding of paper during the process. Another is the scale error during geo-referencing the map. It may be noted that cadastral maps have no projection while the images are projected. When overlaying cadastral map on image by applying a common coordinate system, some distortions do occur at edges and in the shape of features such as road network, plot boundary etc. The errors in reproduction of cadastral maps can be minimized by taking proper precautions. The errors in georeferencing could be controlled by taking precautions through selection of proper field Ground Control Points (GCPs) and identifying the field GCPs in the cadastral as well as satellite images precisely. And by making some finer adjustments, the ecosystem boundaries delineated from satellite images could be matched with real cadastral boundaries on the ground.

The use of satellite imageries in combination with field mapping provides better results in cadastral level mapping. At the same time, various location and spatial errors that could get magnified in large scale maps like cadastral maps require to be contained through appropriate approach.

8.1. Use of Remote sensing data for HTL

With the availability of precision GPS and high resolution satellite data like Quick Bird, IKONOS, Resource Sat (P6) and Cartosat, it is now possible to get a mapping accuracy of less than one meter for the demarcation of HTL/LTL. It requires georeferencing using accurate GPS data at precisely locatable Ground Control Points (GCPs) in satellite images to have improved accuracy level in the identification and demarcation of HTL/LTL. Accurately identifying the positions for HTL with respect to signatures may become difficult when vegetation like coconuts cover the signatures. For getting multispectral data with high spatial resolution, the Cartosat (PAN) image has been merged with IRS-1C/1D LISS III, IRS P6 LISS IV and has been used wherever required. The IRS-1C/1D LISS III image has a spatial resolution of 23.5m; the IRS P6 LISS IV has a resolution of 5.8 m whereas Cartosat-1 (PAN) has a spatial resolution of 2.5 m.

8.2. LTL delineation

The LTL also depends on lunar cycle. The seaward/waterside limit will depend on the width of tidal flat and beach. An initial assessment of LTL could be made from Hydrographical charts. While mapping HTL the signatures of LTL could be noted and the distance from HTL to LTL may be assessed. This is further verified and corrected with the information from Hydrographical charts and satellite imageries. Information on LTL is derived from satellite imagery by identifying the seaward limit of beach/ tidal flat during fair season when the beaches/ intertidal zone have maximum width.

9. CZMP/CRZ map of Kollam in 1:25000 scale

The Coastal Regulation Zones in Kollam district is given in 8 toposheets of 1:25000 scale. These are:

Sheet Nos. 58 C8 SE, 58 C8 NE, 58 C12 SW, 58 C12 SE, 58 D9 SE, 58 D9 SW, 58 D9 NW, and 58 D9 NE.

The CRZ field mapping was carried out during March 2014 to June 2014. As already discussed High Water Line (HWL) has been extracted from geo-referenced SOI toposheets following standard procedures. Field data was generated in 1:4000 scale from 33 coastal villages of Kollam district including Kollam Corporation and Paravur Municipality.

The HWL has been appropriately modified with the HTL obtained from field observations and satellite imageries for preparing the CZMP as per CRZ 2011.

9.1. Data Sources

In addition to field investigations including GPS/DGPS mapping, data sources such as topographic sheets, hydrographic charts and satellite images have been used. An initial assessment of the morphology and ecosystems is obtained from Google imageries which are mostly QuickBird images. Google imageries (QuickBird) of 2010 and 2011, available in the public domain, were downloaded as different scenes with resolution zoomed to the required level. These are then merged in Photoshop and georeferenced.

PAN merged IRS-1C/1D LISS III and IRS P6 LISS IV data were also used wherever required. Cartosat (PAN) has a resolution of 2.5m, whereas LISS III has 23.5 m resolution. The IRS P6 LISS IV has a resolution of 5.8 m.

9.2. Salinity and upstream boundary

The coastal areas of Kollam district have network of backwaters, estuaries and interconnecting canals. Edava Nadayara Kayal forms the southern boundary of Kollam district which is bordered by Edava Panchayath of Thiruvananthapuram district. Paravur *kayal*, Ashtamudi *kayal*, Vattakayal and Kayamkulam *kayal* are the other major backwaters which are interconnected by T.S. Canal. The major tidal inlets are at Kayamkulam (Azheekal) and Neendakara. Pozhikkara and Kappil are small inlets of which Pozhikkara is an artificial one. Ithikkara River and Kallada River are the major recharging rivers of this estuarine ecosystem flowing into Paravur *kayal* and Ashtamudi *kayal* respectively. Pallikkal River is another river that flows into Vattakayal. Salinity measurements have been carried out to determine the upstream boundary of CRZ along these rivers and canals during February to April 2014. 5ppt salinity is observed upstream along Pallikkal river up to Karoorkadavu bridge, along Kallada river up to Njankadavu Bridge and along Ithikara river up to the flooded area near Kundumon bridge. In some places, the influence of tidal action has been observed further upstream of what is given in CZMP (1996). These areas were not as CRZ in the CZMP (1995). The T S Canal and the connected backwaters are shown as influenced by tidal action as given in CZMP (1996) since whatever reclamations, etc

blocking tidal flow that has taken place after February 1991 is not permissible as per CRZ (1991).

10. CRZ categories

The CRZ of Kollam consists of CRZ I (CRZ IA & CRZ IB), CRZ II, CRZ III and CRZ IV. The CRZ IA are those ecologically sensitive and the geomorphological features which play a role in maintaining the integrity of the coast as listed under para '7(i)A' such as mangroves, corals, sand dunes, etc. The CRZ IB is area between Low Tide Line and High Tide Line. The CRZ II is those developed areas (with more than 50% built up area) in legally designated urban areas. Kollam Corporation and Paravur Municipalities are the urban areas in Kollam district. The CRZ in these urban areas which have more than 50% built up area, is CRZ II. The CRZ III is undeveloped areas in the CRZ of Kollam. The CRZ IV is the nearshore waters, the tidal influenced inland waterbodies and the bed. The details are given in the attached CRZ map (Table 1).

The spread of mangrove is limited in Kollam district. Patches of mangroves are observed at Ashtamudi *kayal* (Neendakara village and Thekkumbhagom), Paravur *kayal* (Munrothuruth and Adichanalloor area), south of Kayamkulam inlet of Vattakayal (at Panmana area) and along the banks of Kayamkulam *kayal*. CRZ IB includes the mudflats and inter tidal zones spread along the backwaters and rivers in the CRZ area. The Reclamation of mudflats/tidal flats and waterbody has caused significant changes in the morphology and HTL in certain places.

The urban areas in the district such as Kollam Corporation and Paravur Municipalities are highly developed with very high potential for further development. The Kerala Coastal Zone Management Authority and the Govt of Kerala took the view that the CRZ in these urban areas, other than CRZ I, CRZ IV and open spaces such as parks and play grounds have built up area more than 50% and hence could be considered as CRZ II. Accordingly the CRZ in Kollam Corporation and Paravur Municipality, other than CRZ I, CRZ IV, are shown as CRZ II.

The district has HTL for a length of 799.13 km. The total CRZ area is 53.71 km². Mangrove area (CRZ IA) is 951328m² with a mangrove buffer zone of 2.52km². The intertidal zone (mostly mudflats on the banks of backwater) is spread over 5.94km².




Table 1. CRZ details of Kollam District

HTL Length (km)	Mangroves (CRZ IA) (km ²)	Inter Tidal Zone (CRZ IB) (km ²)	Mangrove buffer zone (CRZ I) (km ²)	CRZ II (km ²)	CRZ III (km ²)
799.13	0.95	5.94	2.52	13.46	40.25

11. Summary

- Kollam District has Lakshadweep Sea is on its west. Edava Nadayara Kayal, Paravur Kayal, Ashtamudi *kayal* and Vattakayal are the major backwaters which are interconnected by the T S Canal. Ithikara Ar, Kallada river and Pallikkal river flow into the backwater/ estuary system. The major tidal inlets are at Kayamkulam (Azheekal) and Neendakara.
- CRZ of Kollam District is contained in toposheets Sheet Nos. 58 D9 SE, 58 D9 SW, 58 D9 NE, 58 D9 NW, 58 C12 SE, 58 C12 SW, 58 C8 SE and 58 C8 NE.
- The CZMP is prepared in 1:25000 scale based on field information collected with respect to 1:4000 cadastral maps.
- *Avicennia officinalis* and *Rhizophora mucronata* are the dominant variety of mangroves
- Flow in many canals is blocked due to reclamations restricting tidal flow. Bunds and sluices have regulated the flow of tidal waters in many canals and rivers.
- Kollam Corporation, Paravur Municipality are highly developed with a very high potential for further development, the CRZ in the Corporation and Municipality, other than CRZ I, CRZ IV and open spaces such as parks and play grounds is considered to have built up area more than 50% and hence categorized as CRZ II.
- The Kollam district has HTL for a length of 799.13 km.
- The CRZ of the District consists of CRZ I, CRZ II and CRZ IV. Parks, play grounds and similar open spaces in urban areas (not shown in the present CZMP) are to be categorized as CRZ III.

- The total CRZ area is 53.71 km².
- The total area of CRZ II in Municipality and Corporation is 13.46 km².
- The total area of CRZ III in the panchayaths of Kollam district is 40.25 km².
- Mangrove area (CRZ IA) is 951328 m² with a mangrove buffer zone of 2.52 km².
- Intertidal zone (which includes sandy beaches and mudflats on the banks of backwater/ river) is CRZ IB and is spread over 5.94 km². In Paravur kayal, the bunds are damaged and coconut plantations are spread intermittently. No distinction is made between biologically active and ‘not biologically active’ mudflats.

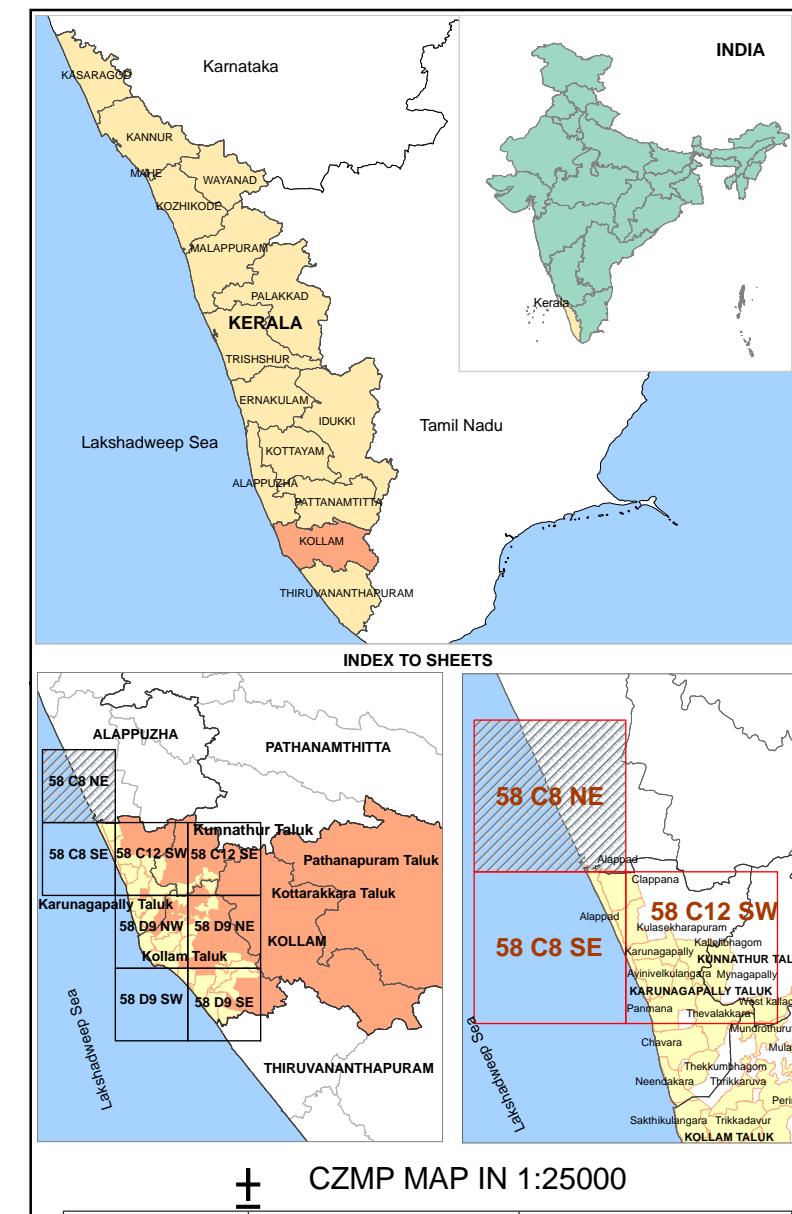

Map Projection : Universal Transverse Mercator (UTM) Zone 43 N
Datum : WGS 84

**CRZ of Kollam District is given in toposheet nos.
58 D9 SW, 58 D9 SE, 58 D9 NW, 58 D9 NE,
58 C12 SW, 58 C12 SE, 58 C8 SE and 58 C8 NE**

Legend

- Road
- Railway line
- Seawall
- Municipal/ Corporation Boundary
- Village Boundary/Block boundary
- High Tide Line
- Low Tide Line
- CRZ Line for River or Backwater
- 100m CRZ Line
- 200m CRZ Line
- 500m CRZ Line
- Mangroves - CRZ IA
- Mangrove Buffer Zone - CRZ I
- Inter Tidal Zone - CRZ IB
- CRZ II (Corporation and Municipal area having builtup area > 50% in the CRZ is CRZ II)
- CRZ III
- Waterbody (sea) - CRZ IV A
- Waterbody (backwater) - CRZ IV B
- Waterbody (non-tidal)
- Survey Plots



Coastal Zone Management Plan Kollam District, Kerala



Mapped During	Scale
March - 2014 June - 2014	0 250 500 1,000 Meters 1:25,000

Checked by	Approved by
------------	-------------

DRAFT MAP

Refer CRZ report for details

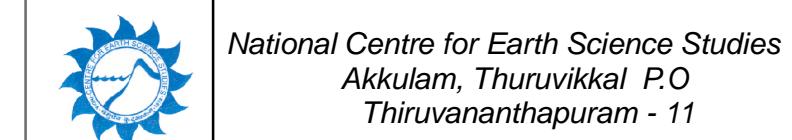

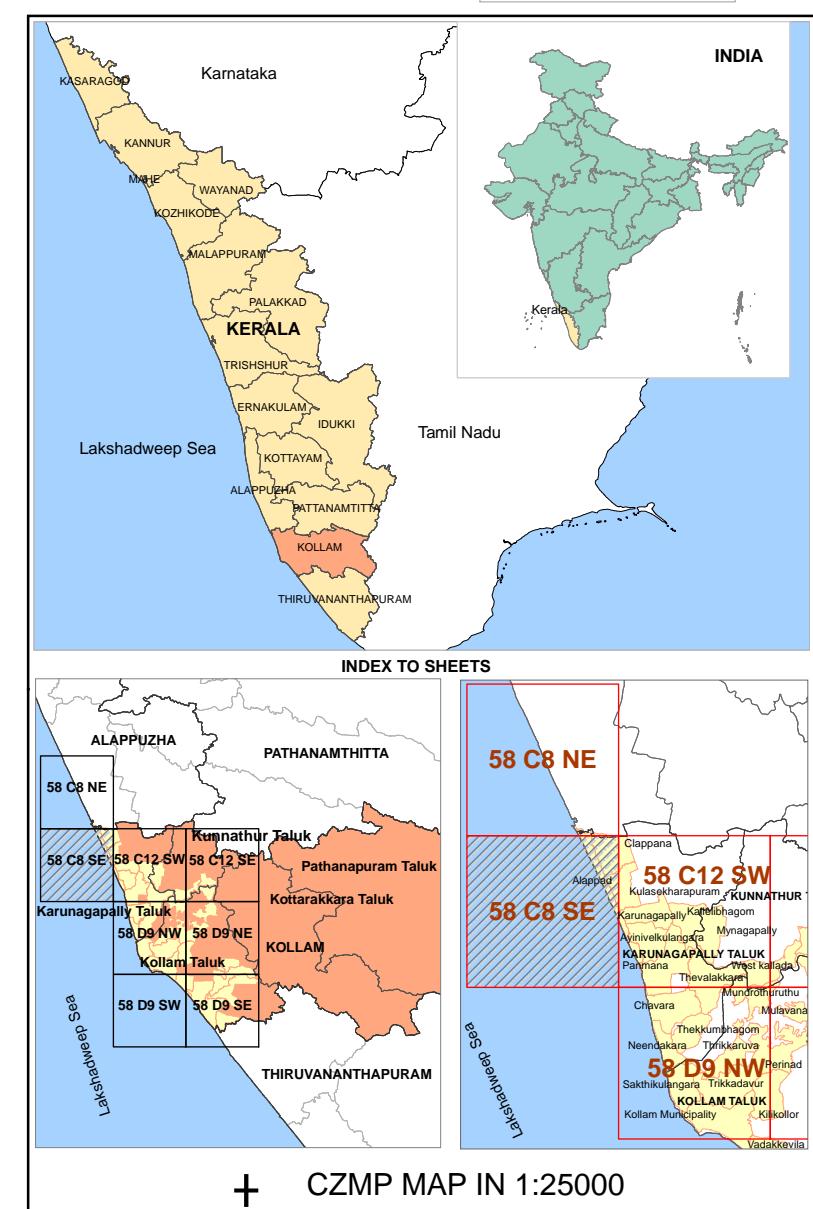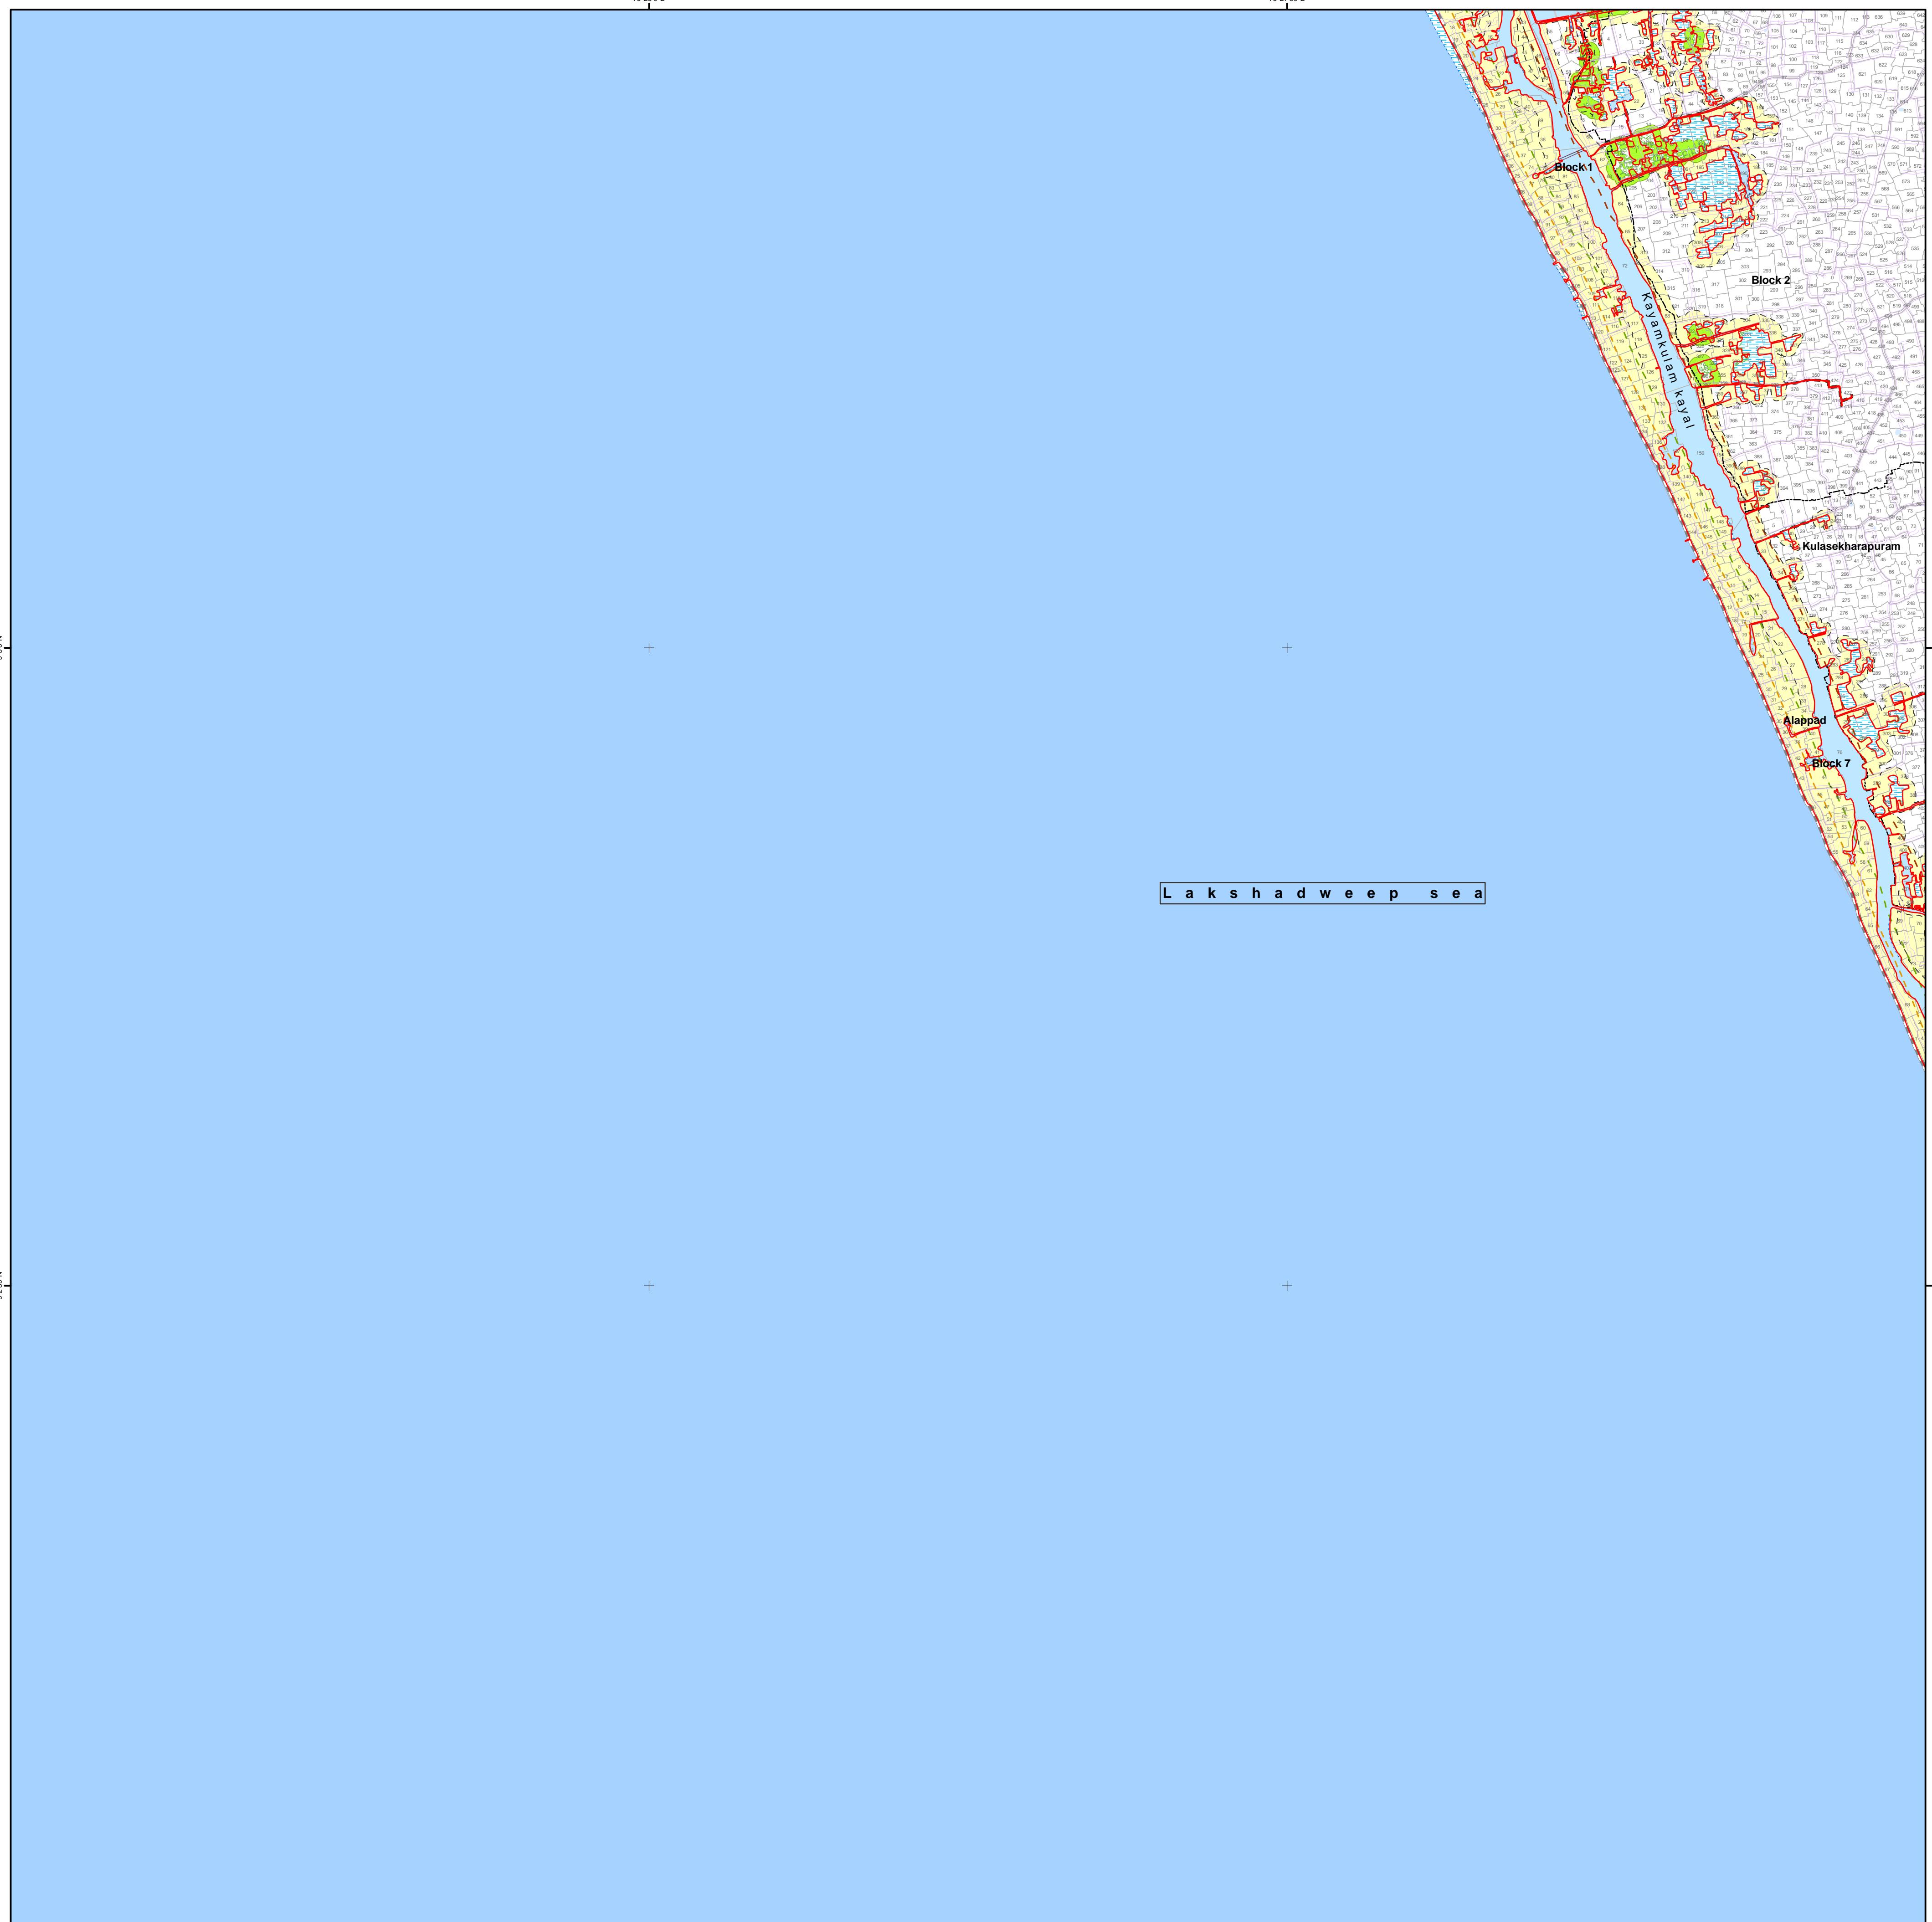

INDEX TO SHEETS		
58 C8 NE	58 C12 SW	58 C8 SE
Kannur Taluk	Kollam Taluk	Kollam

CZMP MAP IN 1:25000

SHEET NO.	DISTRICT	TALUK
58 C8 SE	KOLLAM	KARUNAGAPPALLY

Map Projection : Universal Transverse Mercator (UTM) Zone 43 N
Datum : WGS 84

CRZ of Kollam District is given in toposheet nos.
58 D9 SW, 58 D9 SE, 58 D9 NW, 58 D9 NE,
58 C12 SW, 58 C12 SE, 58 C8 SE and 58 C8 NE

Legend	
Road	
Railway line	
Seawall	
Municipal/ Corporation Boundary	
Village Boundary/Block boundary	
High Tide Line	
Low Tide Line	
CRZ Line for River or Backwater	
100m CRZ Line	
200m CRZ Line	
500m CRZ Line	
Mangroves - CRZ IA	
Mangrove Buffer Zone - CRZ I	
Inter Tidal Zone - CRZ IB	
CRZ II (Corporation and Municipal area having builtup area > 50% in the CRZ is CRZ II)	
CRZ III	
Waterbody (sea) - CRZ IV A	
Waterbody (backwater) - CRZ IV B	
Waterbody (non-tidal)	
Survey Plots	25

Coastal Zone Management Plan Kollam District, Kerala

Mapped During	Scale
March - 2014 June - 2014	0 250 500 1,000 Meters 1:25,000


Checked by	Approved by
------------	-------------

DRAFT MAP

Refer CRZ report for details	National Centre for Earth Science Studies Akkulam, Thiruvikkal P.O Thiruvananthapuram - 11
------------------------------	--

Index Map

58 C12 SE

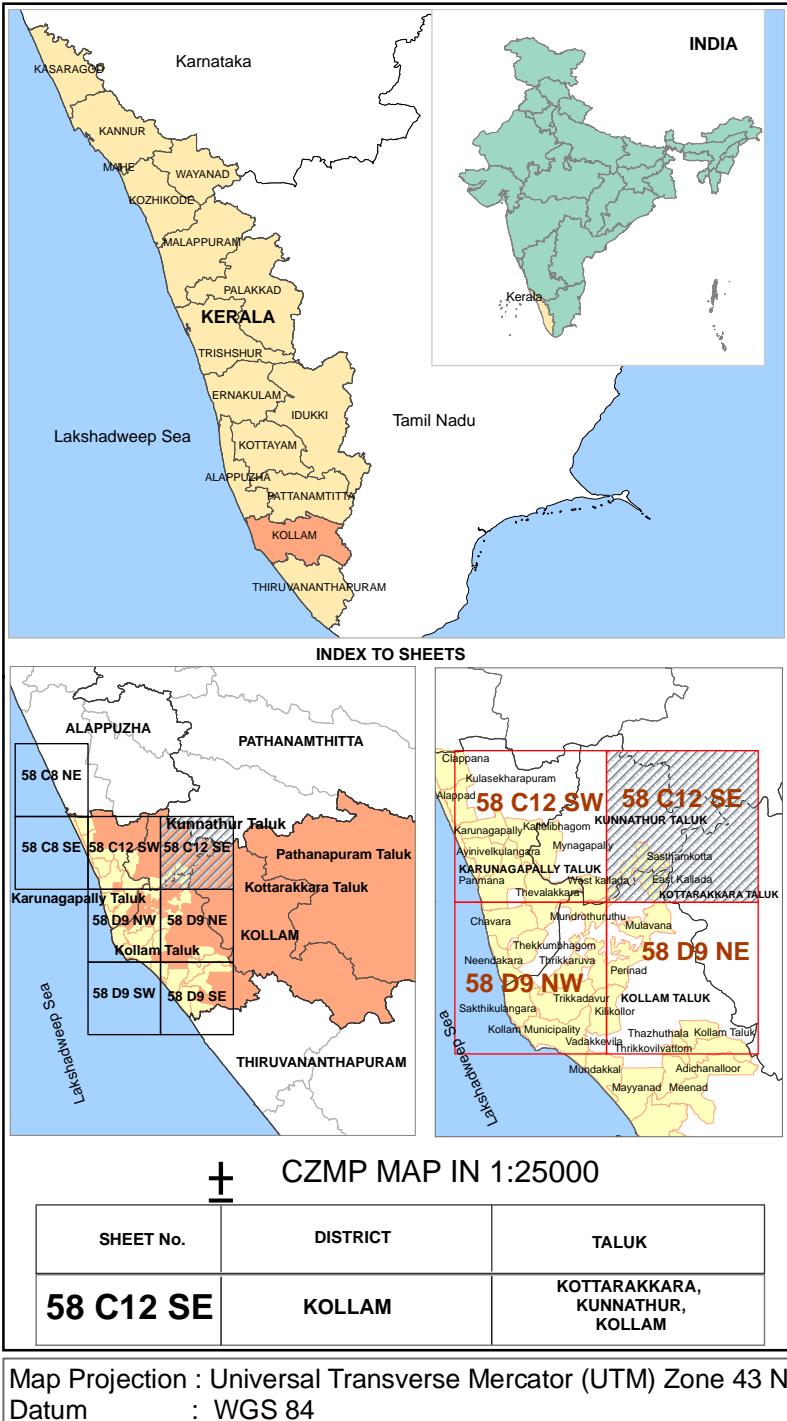

CRZ of Kollam District is given in toposheet nos.
58 D9 SW, 58 D9 SE, 58 D9 NW, 58 D9 NE,
58 C12 SW, 58 C12 SE, 58 C8 SE and 58 C8 NE

Continued to sheet no. 58 C12 SW


9°30'N

76°40'0"E

+

9°30'N

76°42'30"E

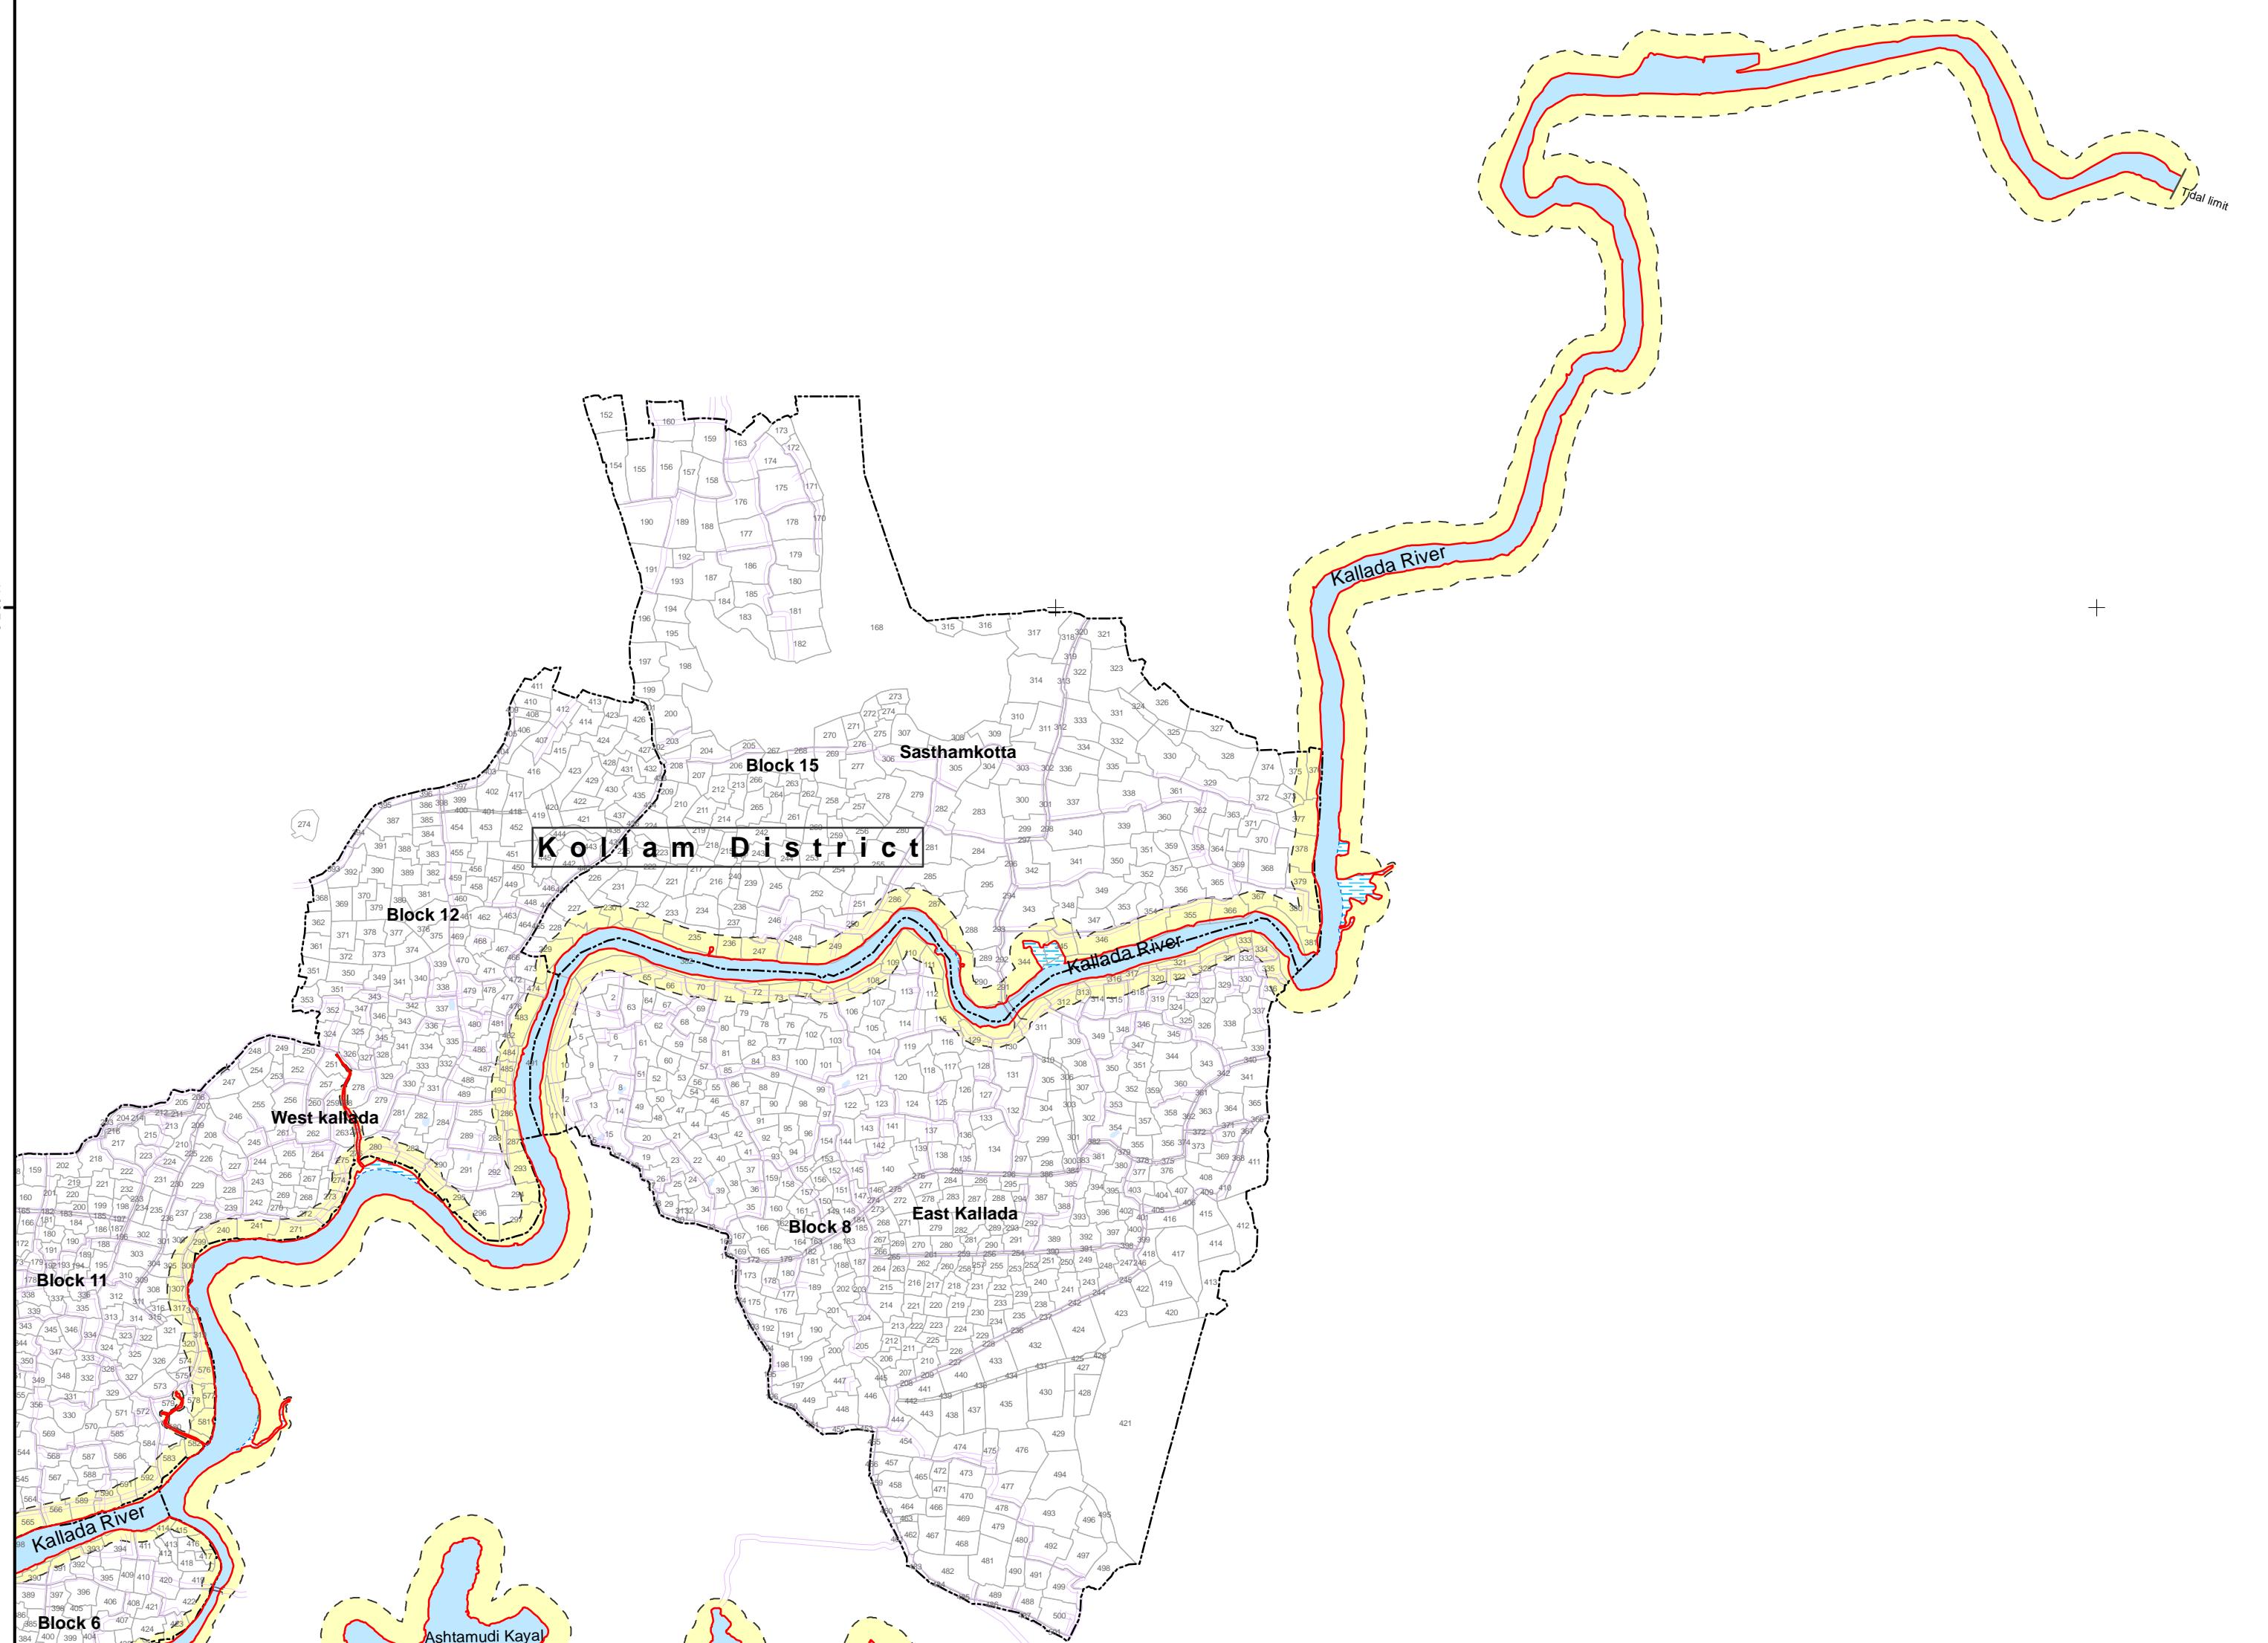

Continued to sheet no. 58 D9 NE

76°42'30"E

C Z M P o f K E R A L A - Prepared for Govt. of Kerala by National Centre for Earth Science Studies

Legend

- Road
- Railway line
- Seawall
- Municipal/ Corporation Boundary
- Village Boundary/Block boundary
- High Tide Line
- Low Tide Line
- CRZ Line for River or Backwater
- 100m CRZ Line
- 200m CRZ Line
- 500m CRZ Line
- Mangroves - CRZ IA
- Mangrove Buffer Zone - CRZ I
- Inter Tidal Zone - CRZ IB
- CRZ II (Corporation and Municipal area having builtup area > 50% in the CRZ is CRZ II)
- CRZ III
- Waterbody (sea) - CRZ IV A
- Waterbody (backwater) - CRZ IV B
- Waterbody (non-tidal)
- Survey Plots



**Coastal Zone Management Plan
Kollam District, Kerala**

Mapped During	Scale
March - 2014 June - 2014	0 250 500 1,000 Meters 1:25,000

Checked by	Approved by
------------	-------------

DRAFT MAP

Refer CRZ report for details	
	National Centre for Earth Science Studies Akkulam, Thiruvilikal P.O Thiruvananthapuram - 11

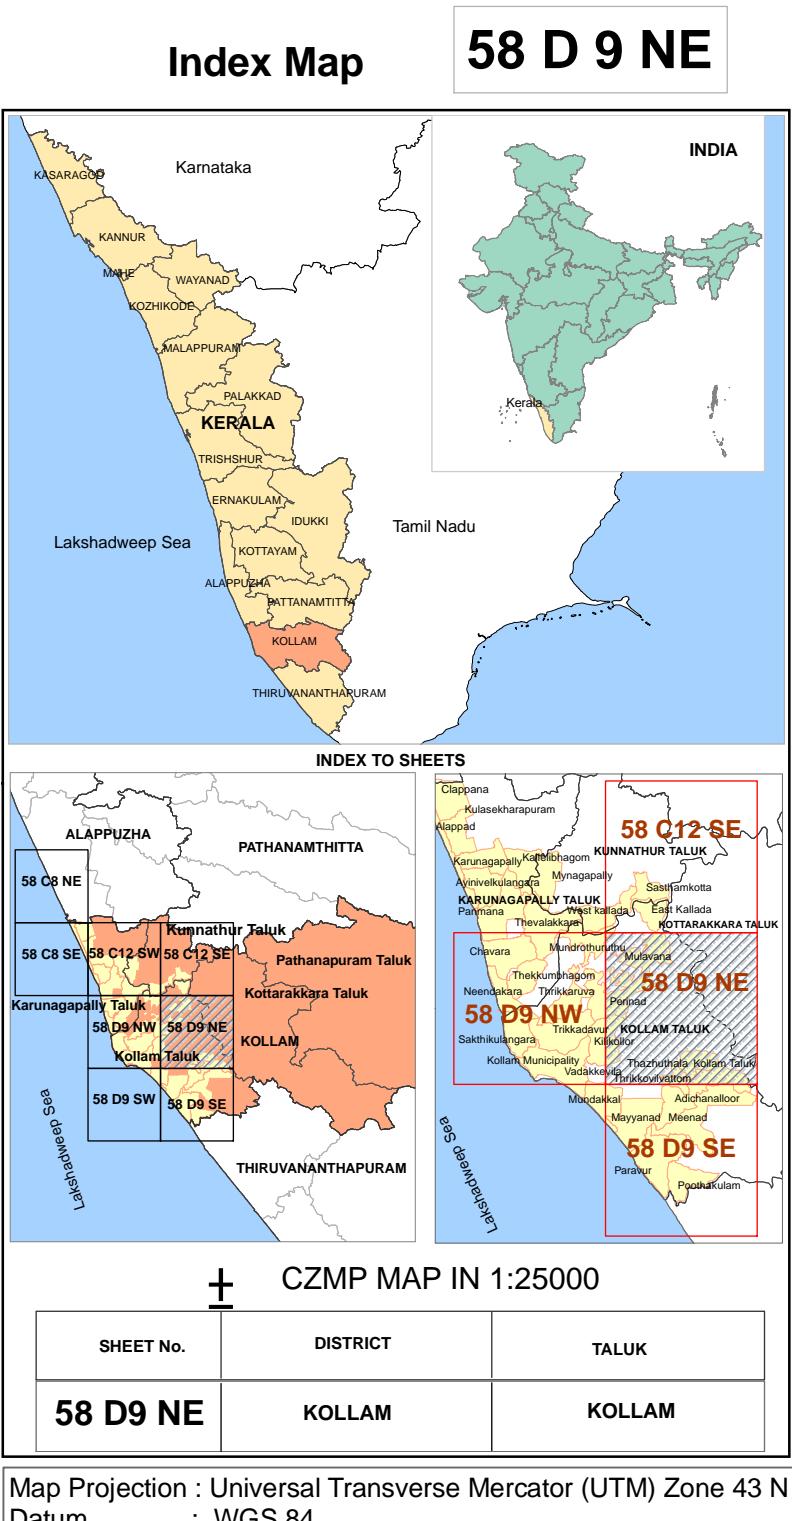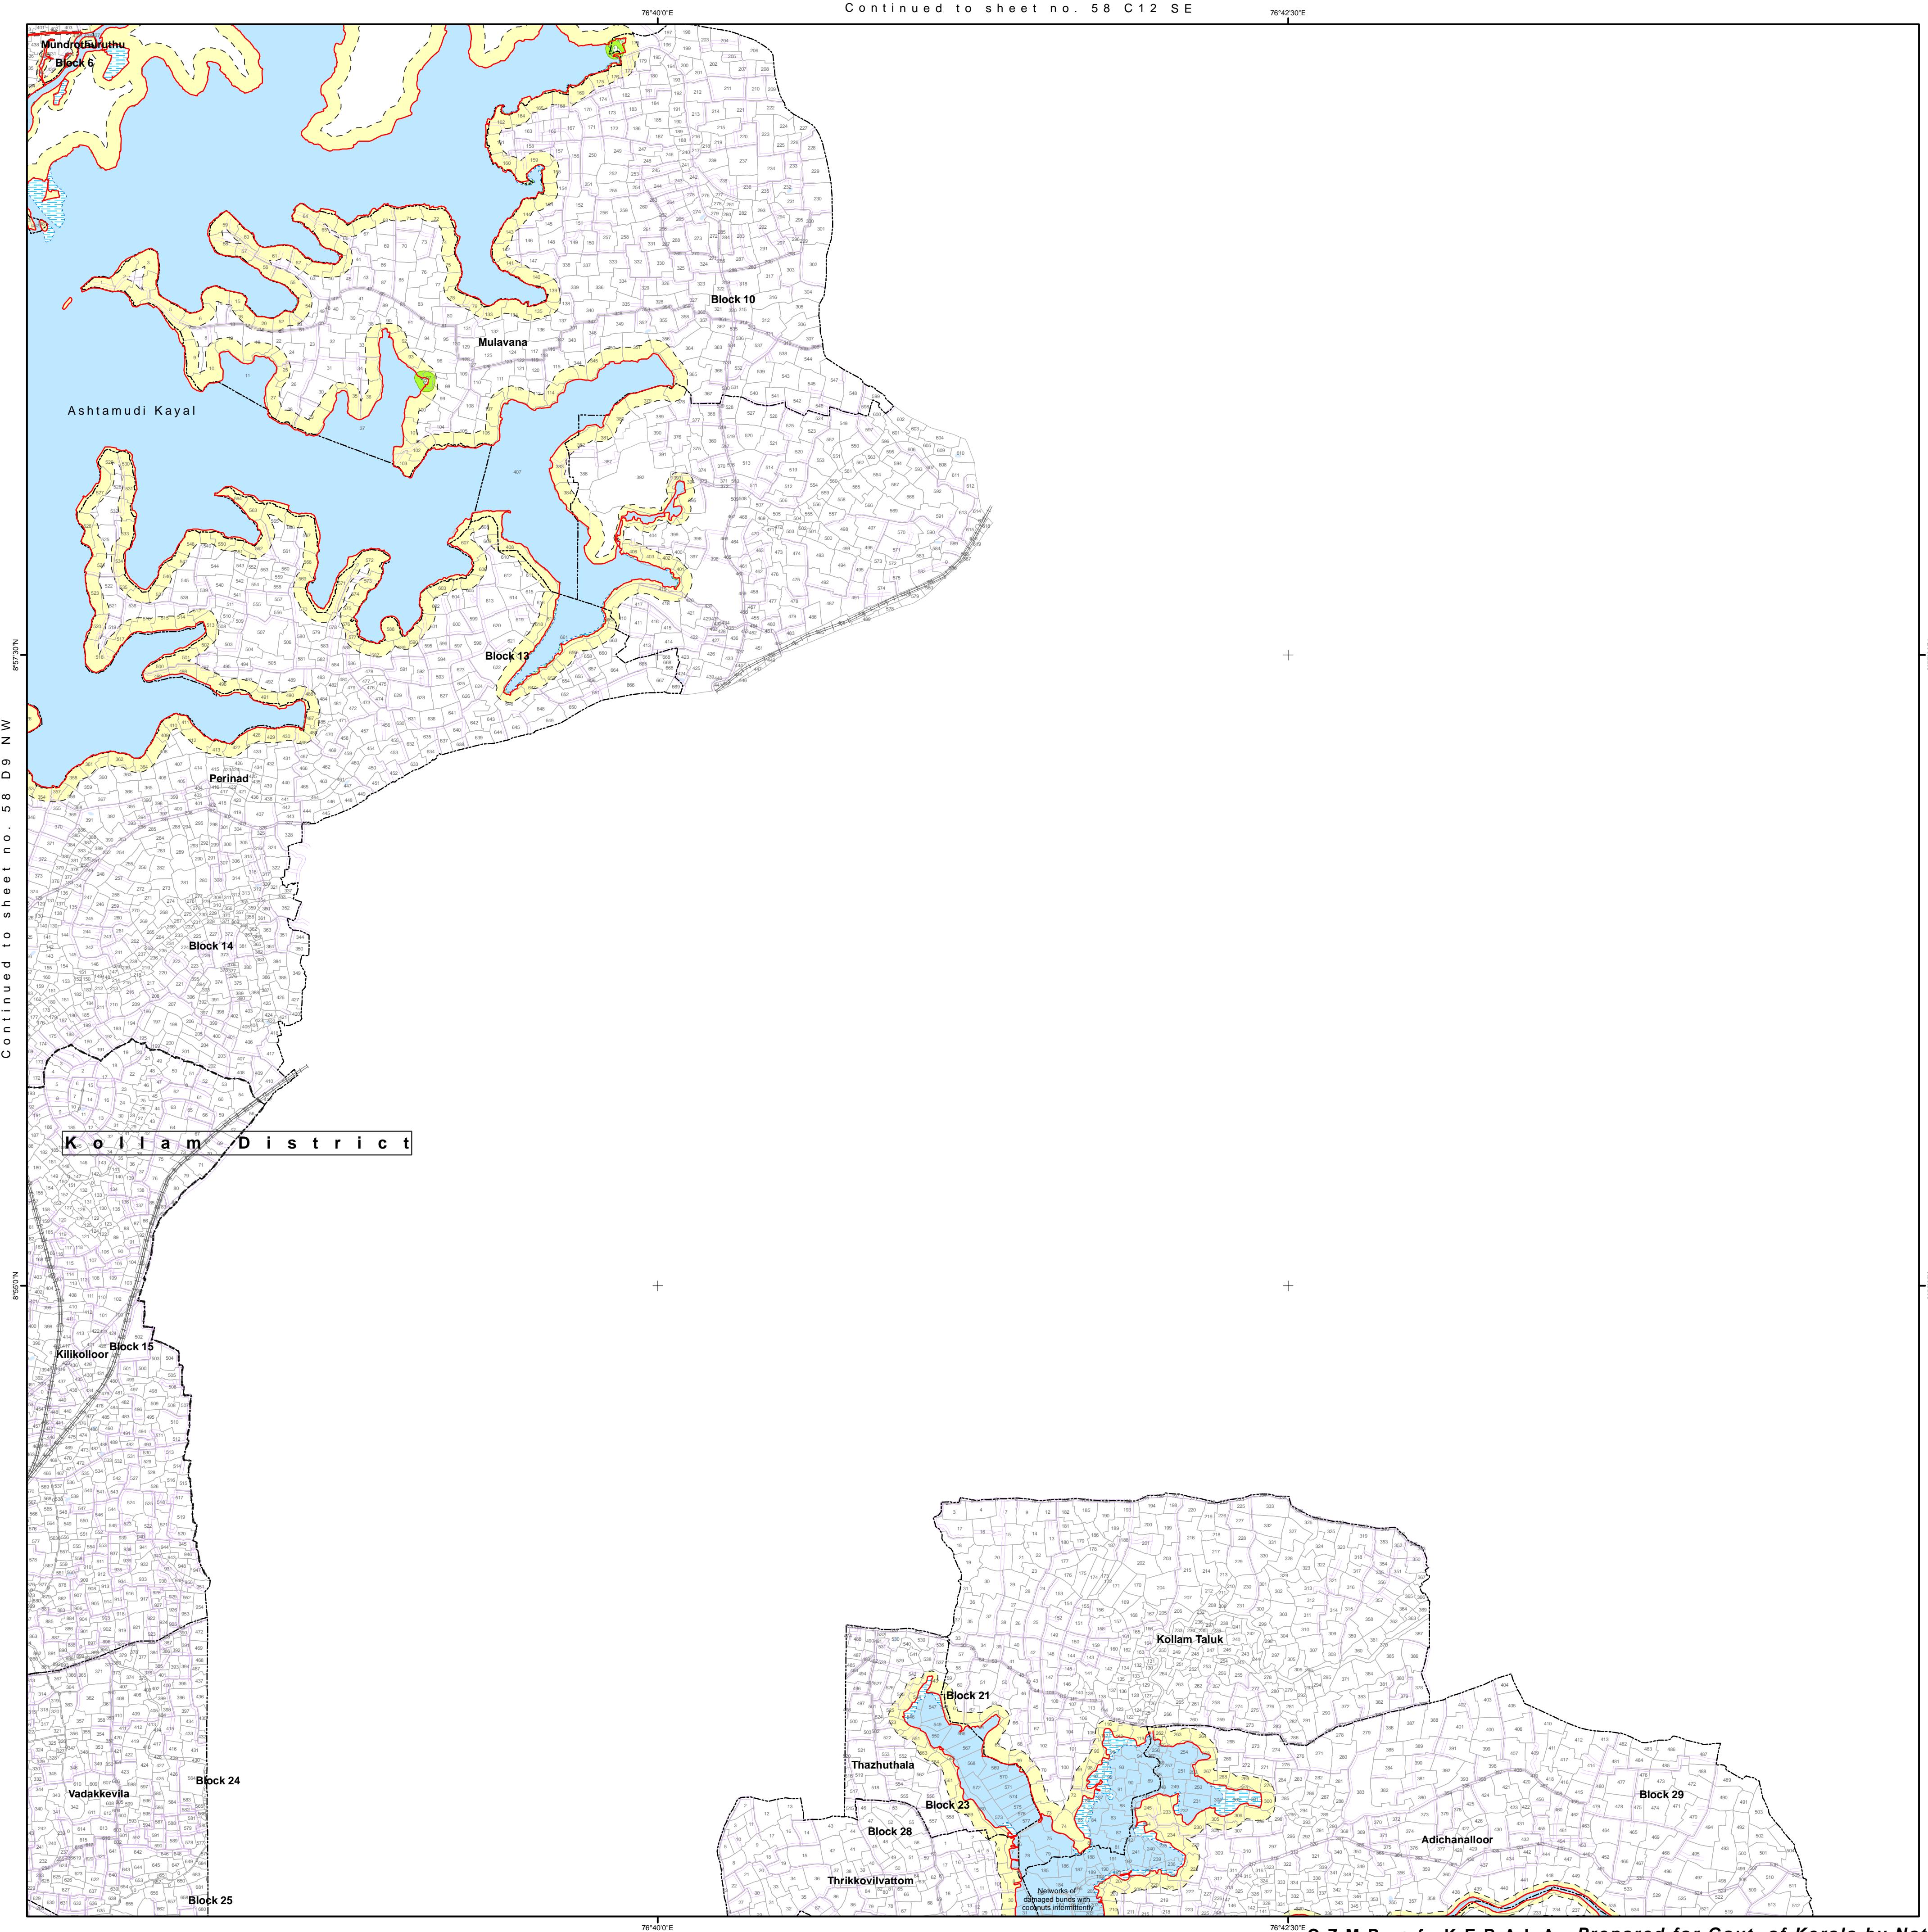

**CRZ of Kollam District is given in toposheet nos.
58 D9 SW, 58 D9 SE, 58 D9 NW, 58 D9 NE,
58 C12 SW, 58 C12 SE, 58 C8 SE and 58 C8 NE**

Legend



- Road
 - Railway line
 - Seawall
 - Municipal/ Corporation Boundary
 - Village Boundary/Block boundary
 - High Tide Line
 - Low Tide Line
 - CRZ Line for River or Backwater
 - 100m CRZ Line
 - 200m CRZ Line
 - 500m CRZ Line
 -  Mangroves - CRZ IA
 -  Mangrove Buffer Zone - CRZ I
 -  Inter Tidal Zone - CRZ IB
 -  CRZ II (Corporation and Municipal area having buildup area > 50% in the CRZ is CRZ II)
 -  CRZ III
 -  Waterbody (sea) - CRZ IV A
 -  Waterbody (backwater) - CRZ IV B
 -  Waterbody (non-tidal)
 -  Survey Plots

Coastal Zone Management Plan Kollam District, Kerala

Mapped During	Scale
March - 2014	 <p>0 250 500 1,000 Meters</p>
June - 2014	<p>1:25,000</p>

Checked by _____ Approved by _____

Refer CRZ report for details

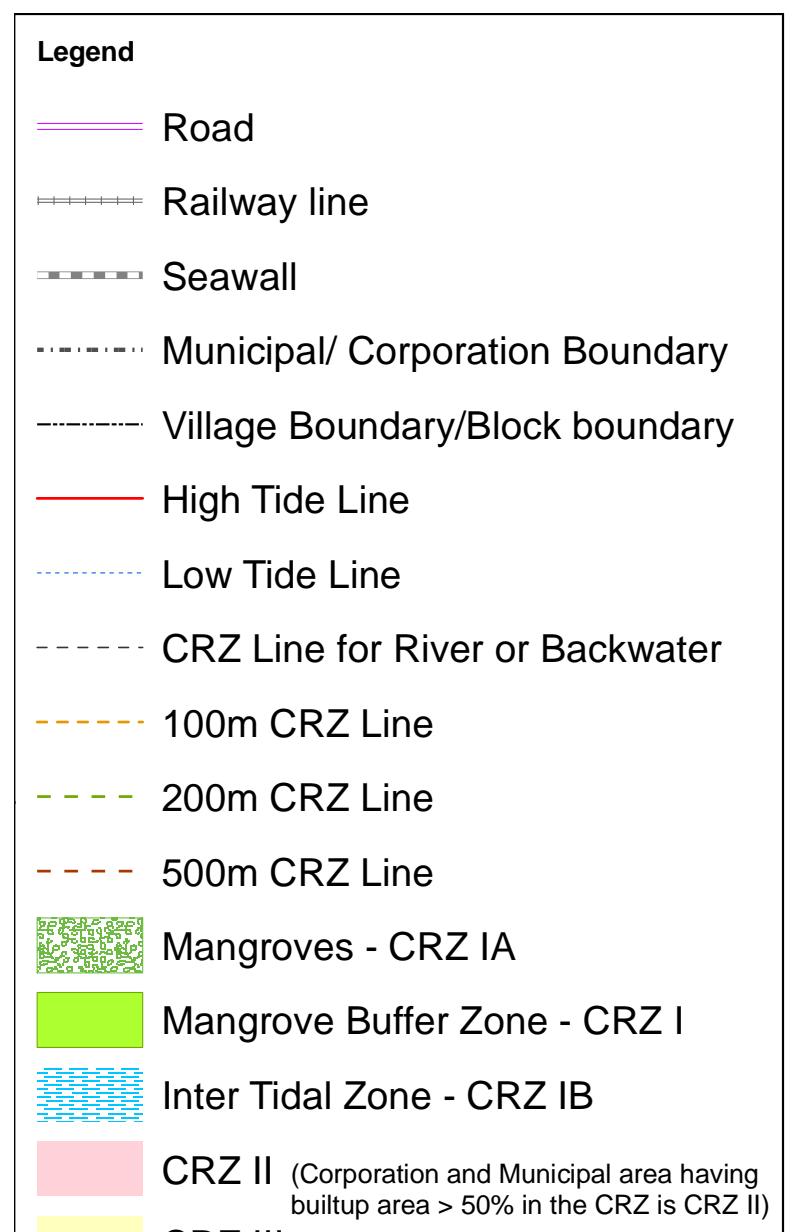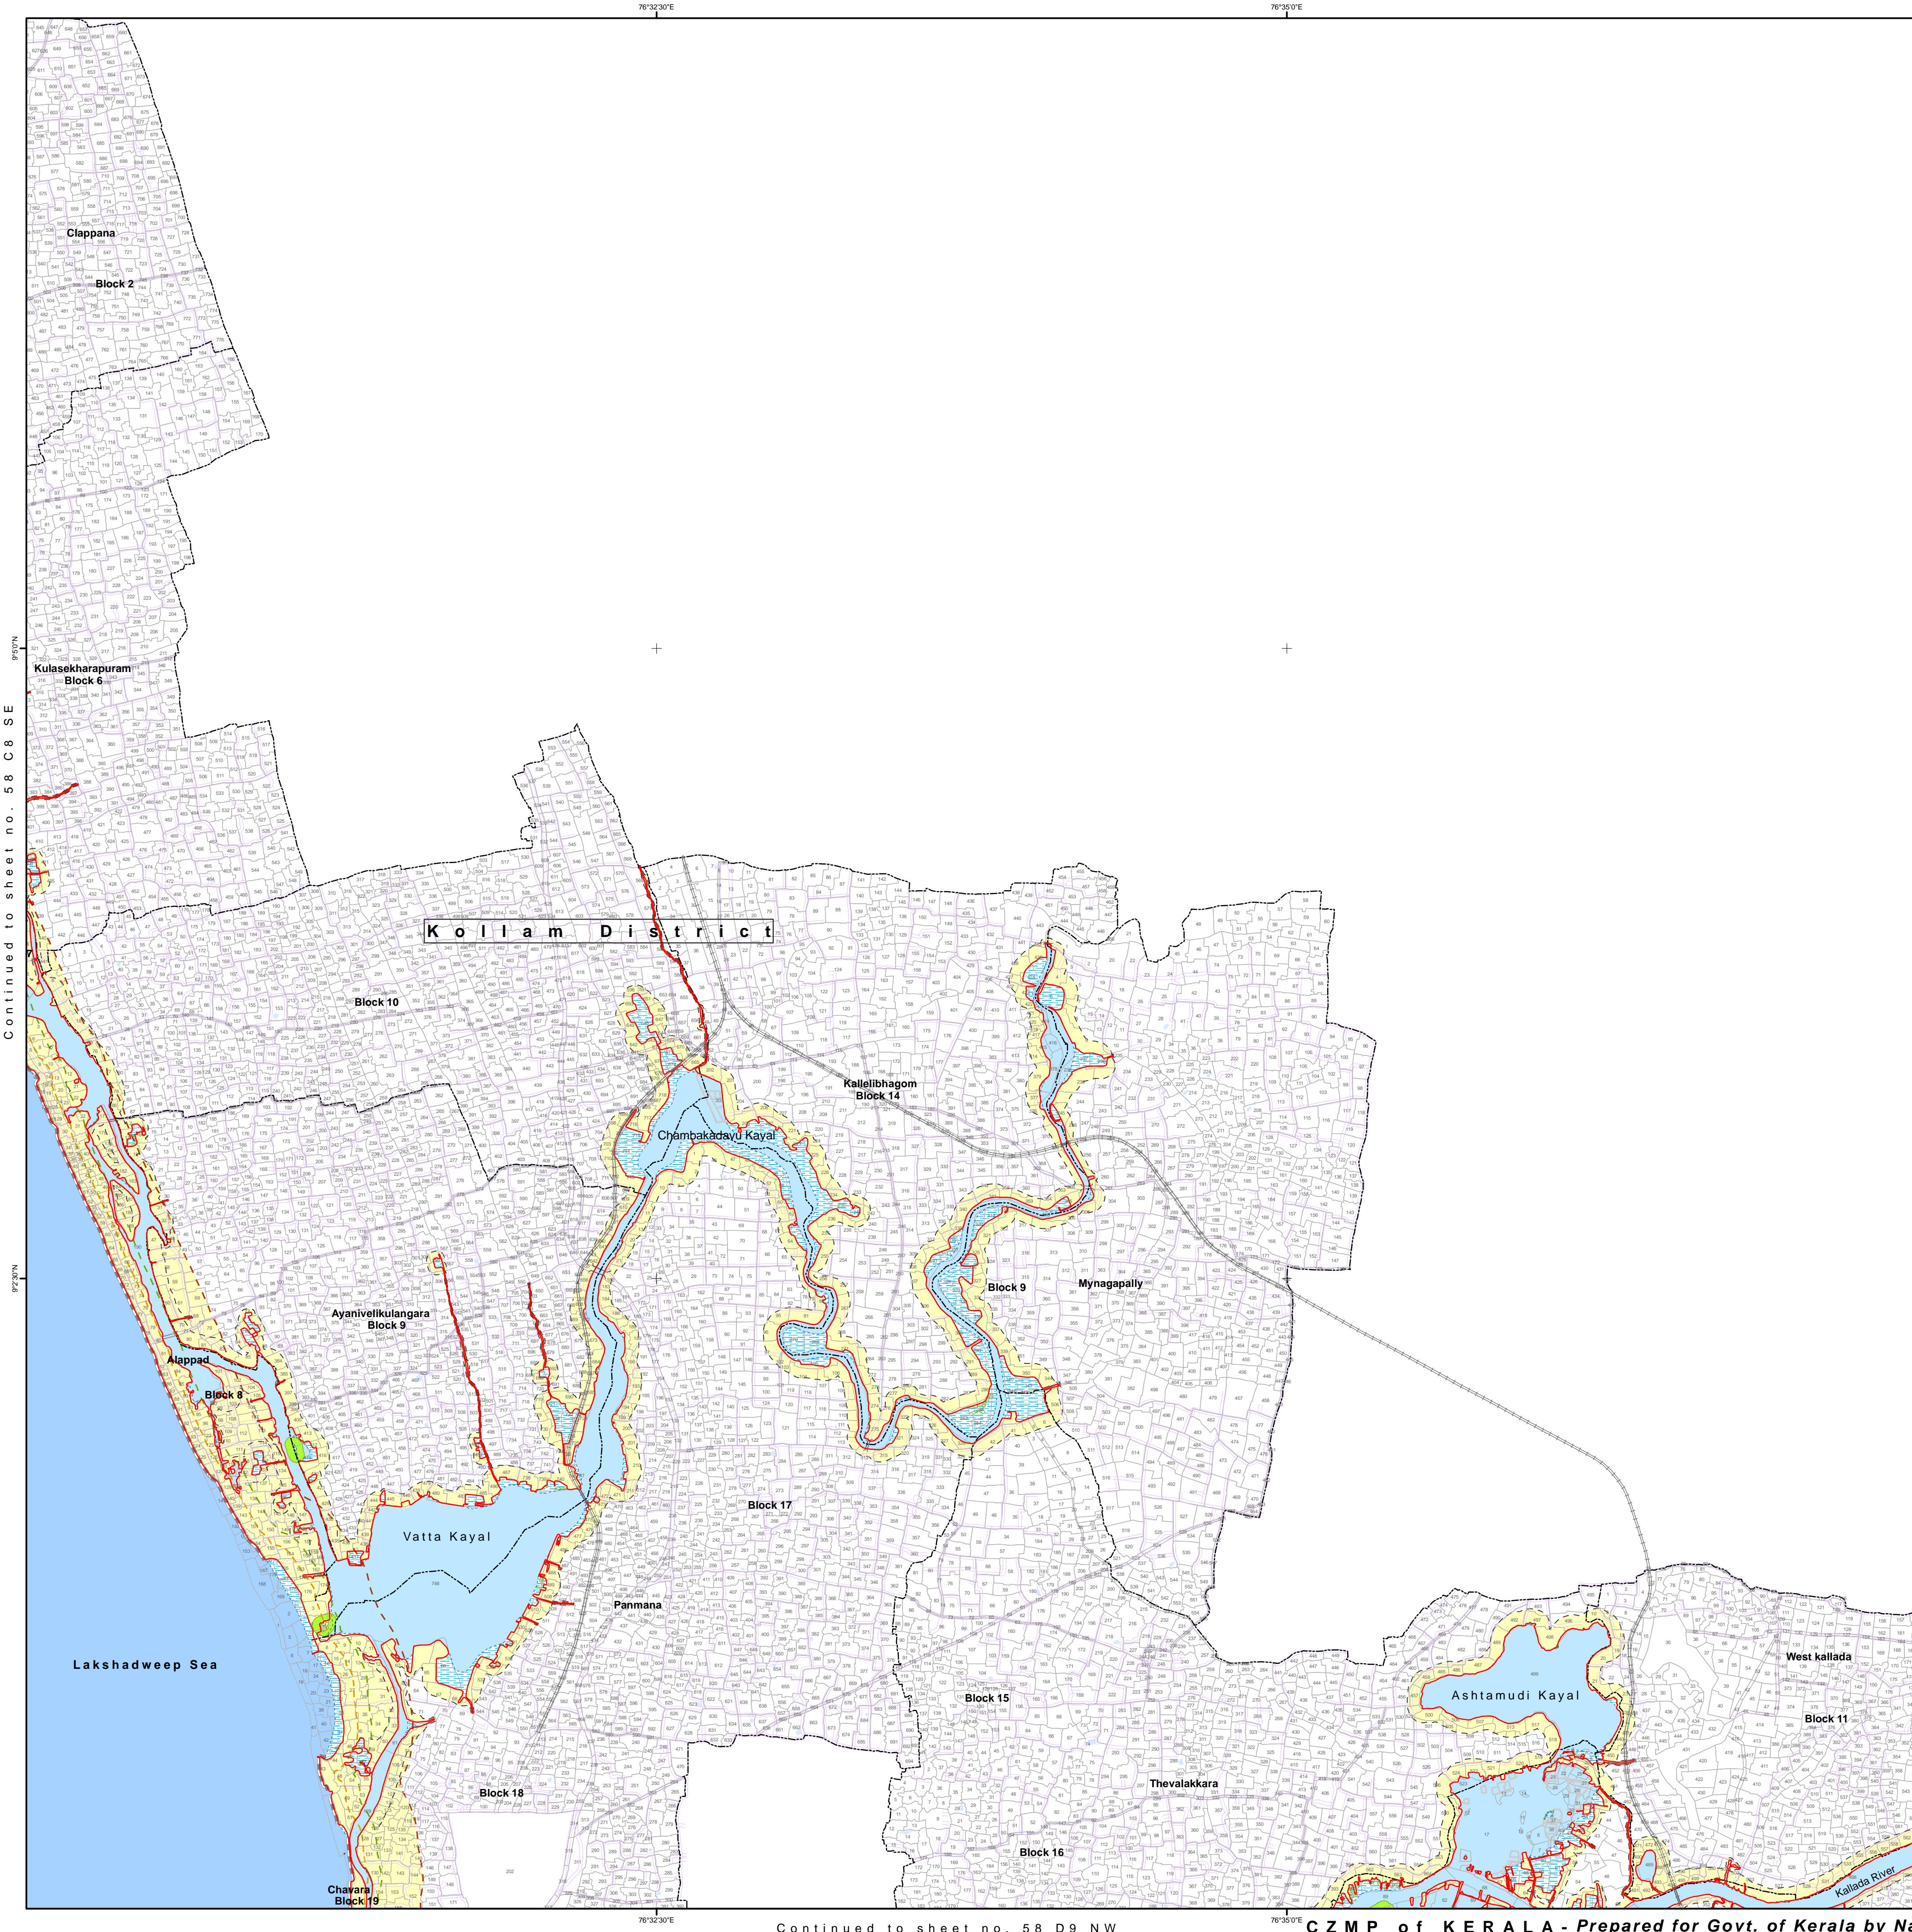

Coastal Zone Management Plan Kollam District, Kerala


Mapped During	Scale
March - 2014 June - 2014	0 250 500 1,000 Meters 1:25,000

Checked by Approved by

DRAFT MAP

Refer CRZ report for details

National Centre for Earth Science Studies
Akkulam, Thiruvikkal P.O
Thiruvananthapuram - 11

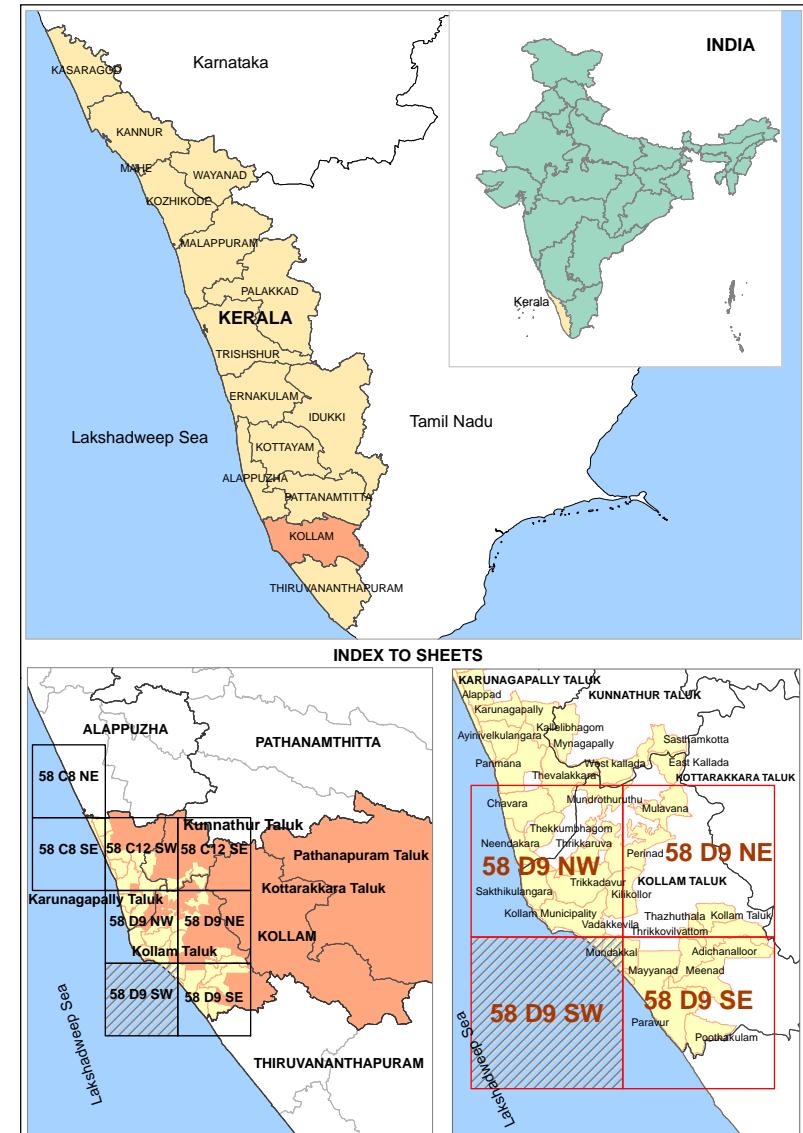

INDEX TO SHEETS		
SHEET NO.	DISTRICT	TALUK
58 D9 SW	KOLLAM	KOLLAM

Map Projection : Universal Transverse Mercator (UTM) Zone 43 N
Datum : WGS 84

CRZ of Kollam District is given in toposheet nos.
58 D9 SW, 58 D9 SE, 58 D9 NW, 58 D9 NE,
58 C12 SW, 58 C12 SE, 58 C8 SE and 58 C8 NE

Legend	
Road	
Railway line	
Seawall	
Municipal/ Corporation Boundary	
Village Boundary/Block boundary	
High Tide Line	
Low Tide Line	
CRZ Line for River or Backwater	
100m CRZ Line	
200m CRZ Line	
500m CRZ Line	
Mangroves - CRZ IA	
Mangrove Buffer Zone - CRZ I	
Inter Tidal Zone - CRZ IB	
CRZ II (Corporation and Municipal area having builtup area > 50% in the CRZ is CRZ II)	
CRZ III	
Waterbody (sea) - CRZ IV A	
Waterbody (backwater) - CRZ IV B	
Waterbody (non-tidal)	
Survey Plots	


Coastal Zone Management Plan Kollam District, Kerala


Mapped During	Scale
March - 2014 June - 2014	0 250 500 1,000 Meters 1:25,000

Checked by	Approved by
------------	-------------

DRAFT MAP

Refer CRZ report for details	National Centre for Earth Science Studies Akkulam, Thiruvilkal P.O Thiruvananthapuram - 11
------------------------------	--

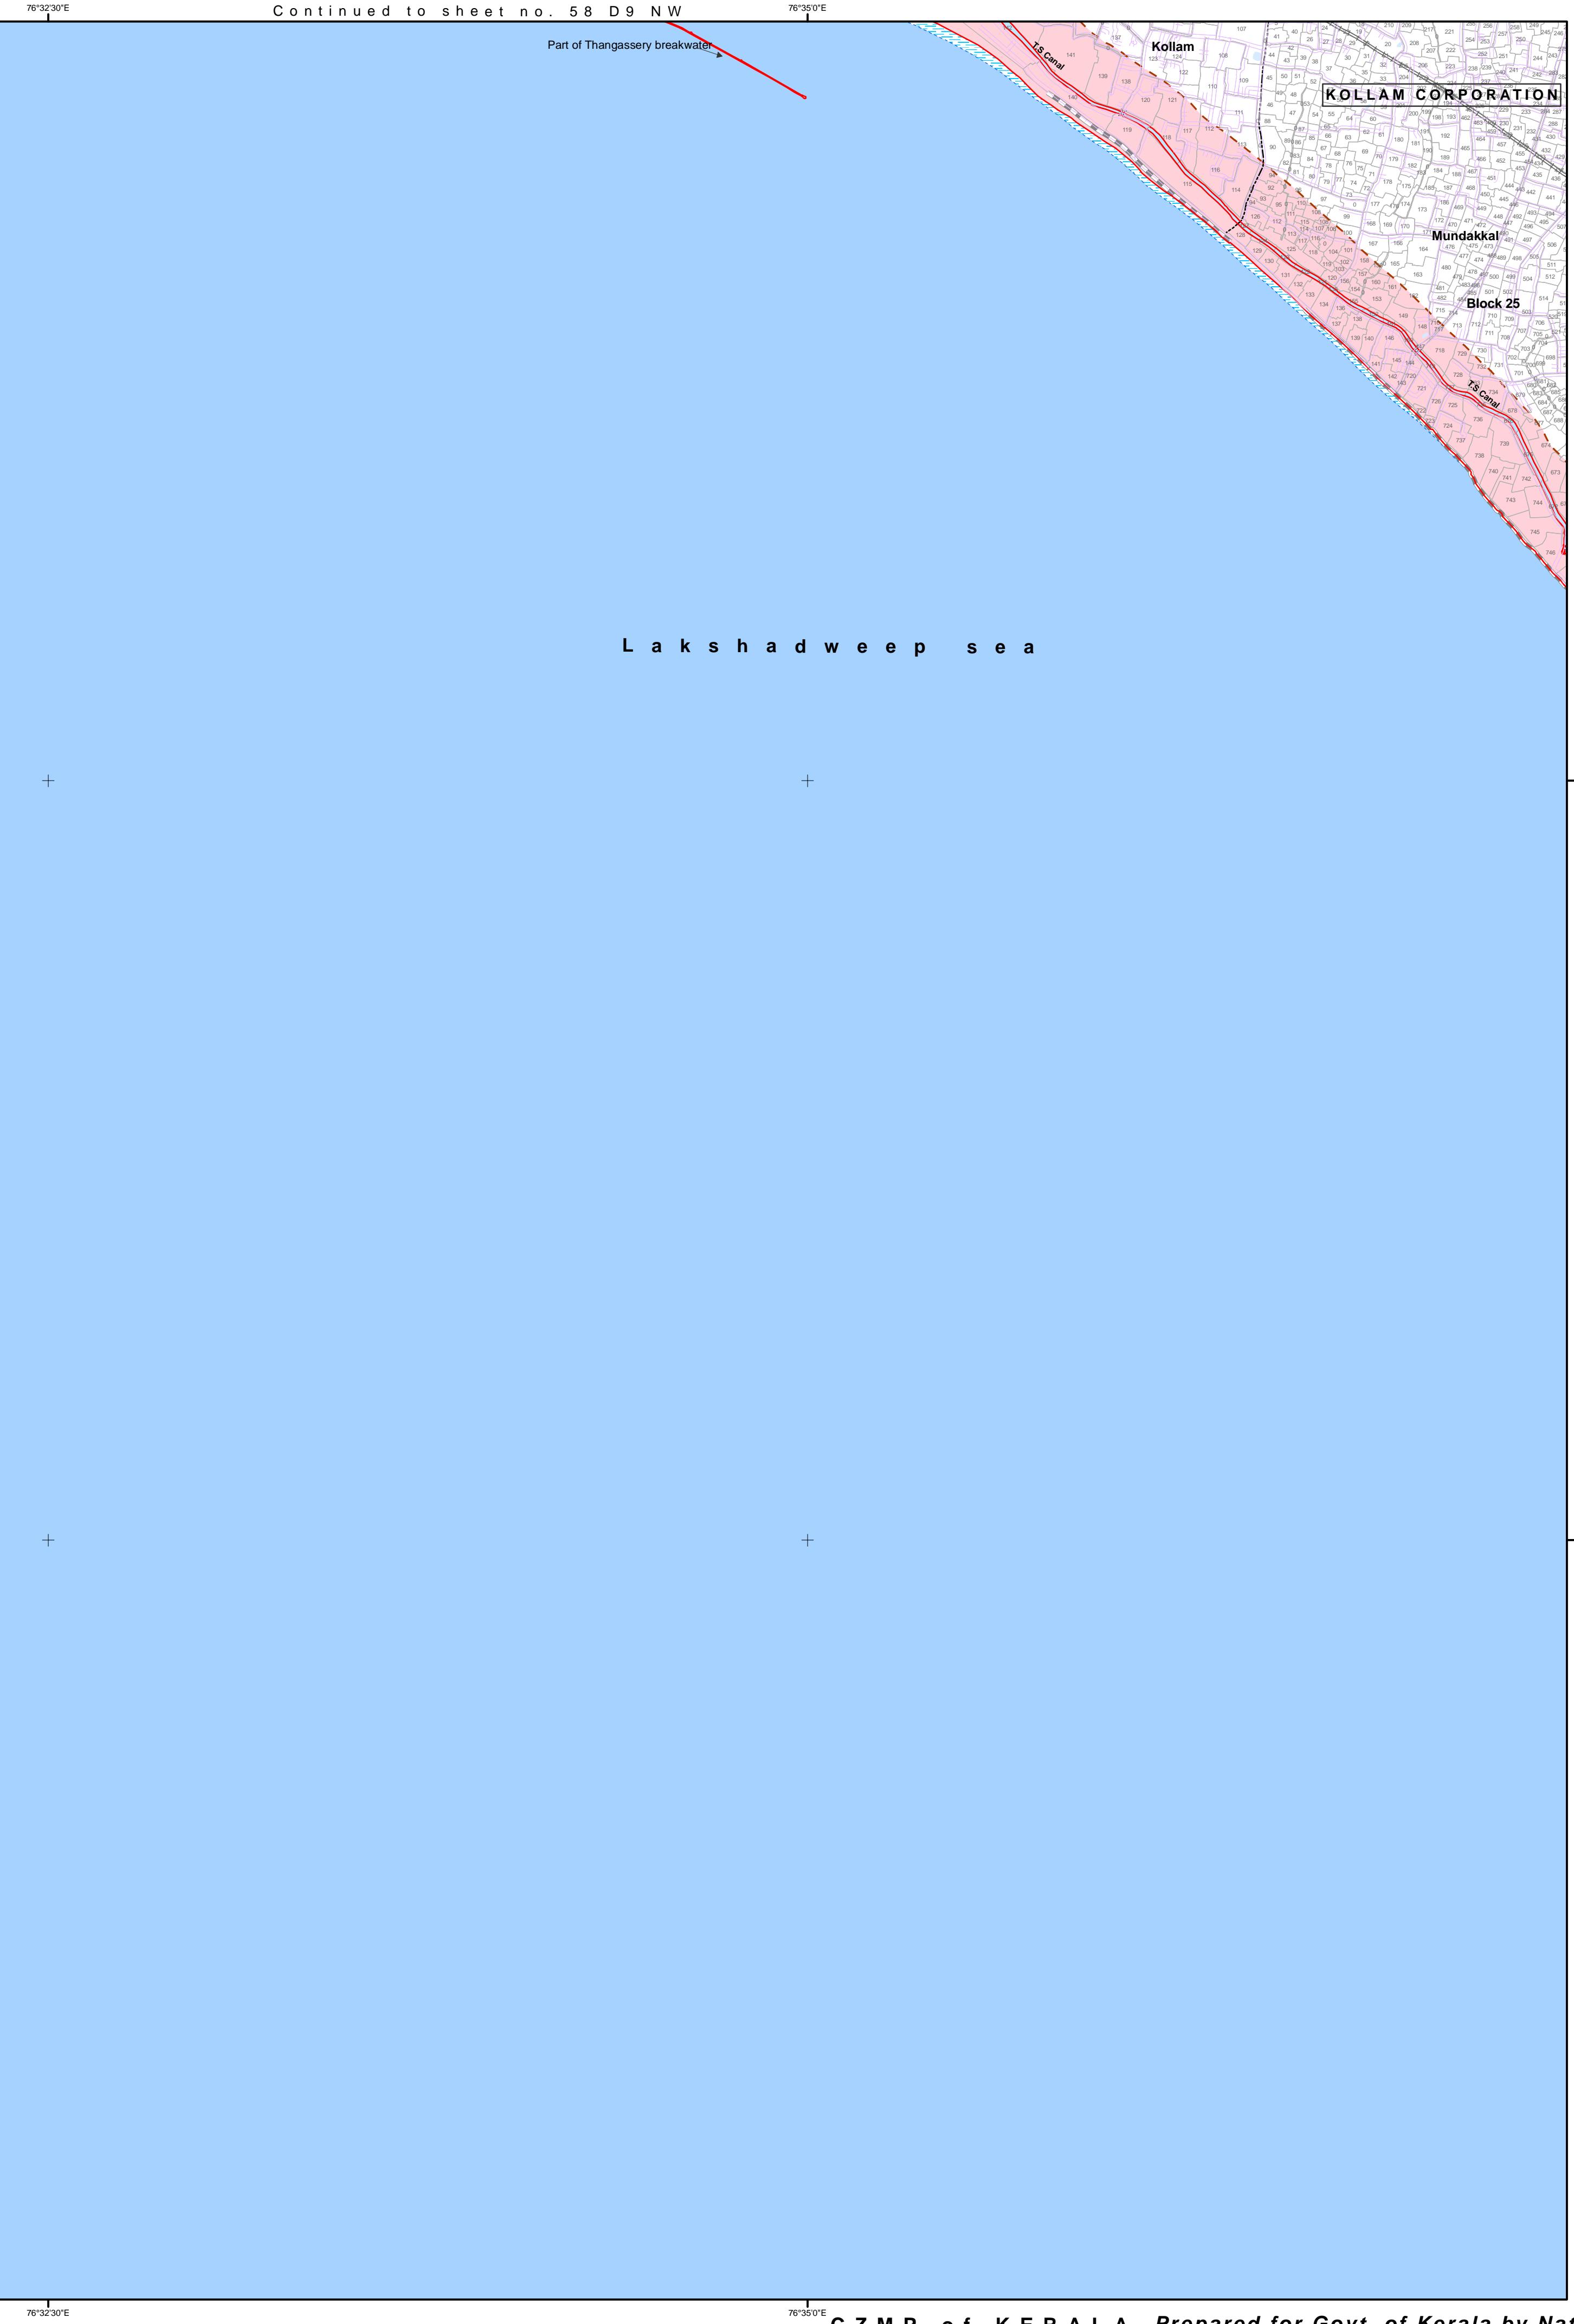

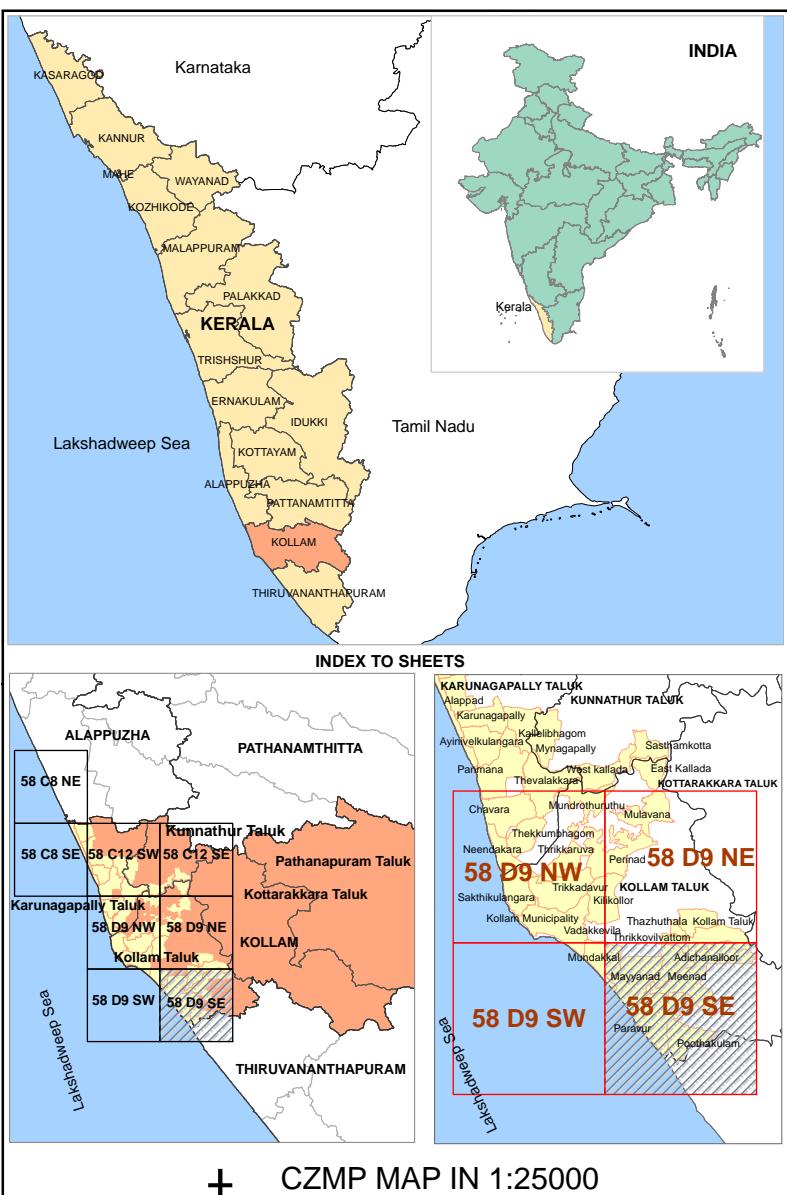


CZMP MAP IN 1:25000

SHEET NO.	DISTRICT	TALUK
58 D9 SE	KOLLAM	KOLLAM

Map Projection : Universal Transverse Mercator (UTM) Zone 43 N
Datum : WGS 84

CRZ of Kollam District is given in toposheet nos.
58 D9 SW, 58 D9 SE, 58 D9 NW, 58 D9 NE,
58 C12 SW, 58 C12 SE, 58 C8 SE and 58 C8 NE

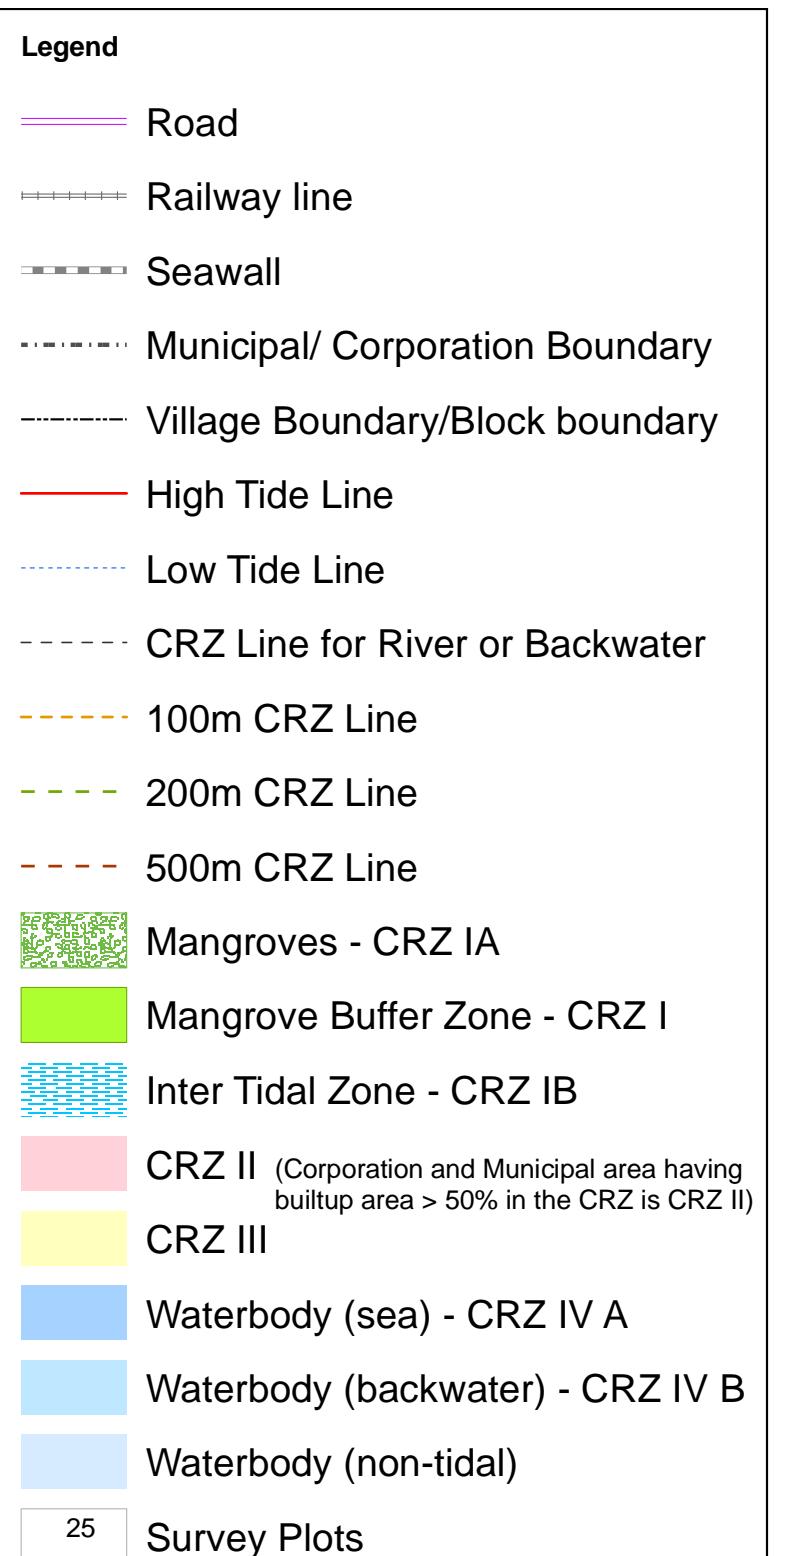

Coastal Zone Management Plan Kollam District, Kerala

Mapped During	Scale
March - 2014 June - 2014	0 250 500 1,000 Meters 1:25,000

Checked by	Approved by

DRAFT MAP

Refer CRZ report for details

